

# M4 M8 & M4-3A

## LED RGBW Controller

**SAled**<sup>®</sup>  
AUSTRALIA

### Parameter:

RGBW Receiver:

- Model: M4-3A
- Power Input: 12-24V DC
- Max Current Load: 3Ax4CH Max 12A
- Max Output Power: [0-36...72W]x4CH
- Working Temp.: -30°C-55°C
- Dimensions: L125xW33xH20(mm)
- Weight(N.W.): 60g



**LTECH**

**RGBW**



(warranty)  
5 years




RGBW Remote:

- Model: M4/M8
- Working Voltage: 3V (battery CR2032)
- Working Frequency: 433.92MHz
- Remote Distance: 40m-50m
- Working Temp.: -30°C-55°C
- Remote Dimensions: L104xW58xH9(mm)
- Remote Weight(N.W.): 42g



Wall-mounted

### System Diagram:

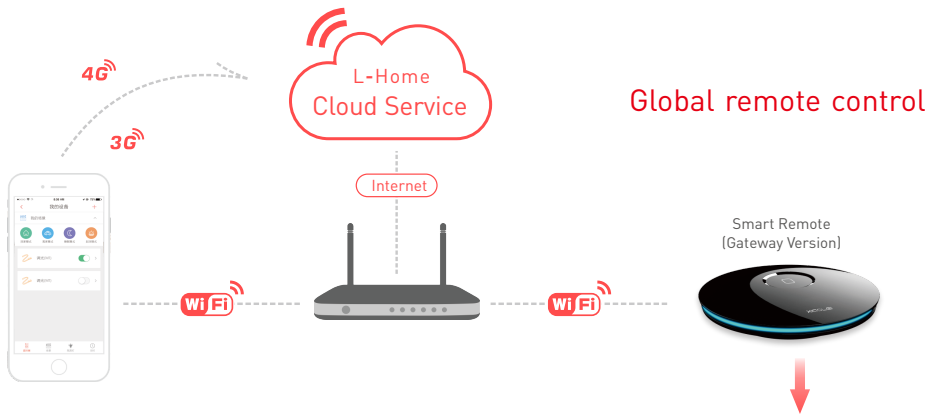

M1+M3-3A



M2+M3-3A



M3+M3-3A



M5+M3-3A



M6+M3-3A



M7+M3-3A



M4+M4-3A



M8+M4-3A





SPI-16+M16

## Operating Instruction for Remote:

# LTECH

# RGBW

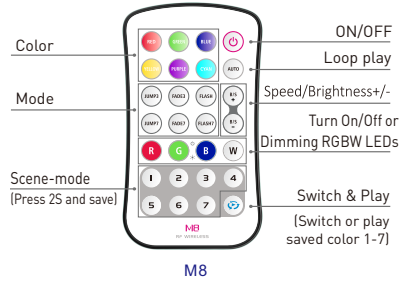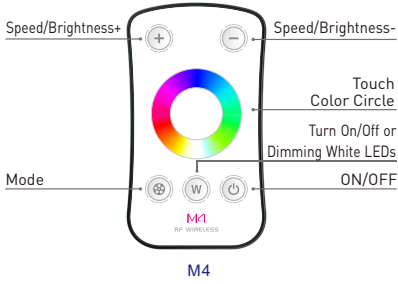

### M4 Changing Mode Table

No.	Mode	No.	Mode
1	Static Red	7	Static White
2	Static Green	8	RGB Skipping
3	Static Blue	9	7 Colors Skipping
4	Static Yellow	10	RGB Color Smooth
5	Static Purple	11	Full-color Smooth
6	Static Cyan	12	Static Black


### The Learning ID Method:

Remote has been matched to the receiver before leave factory, if deleted accidentally, you can learn ID as follow.


**Learning ID:** Short Press "ID learning button" on the M4-3A receiver, the running light is on, then press any key on M4/M8 remote , the running light flashes several times, activated.

**Canceling ID:** Press "ID learning button" on the M4-3A receiver for 5 seconds.

## Dimensions

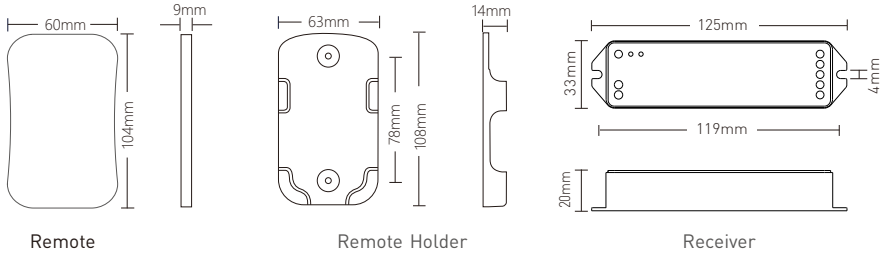

## Operating Instruction for Receiver:

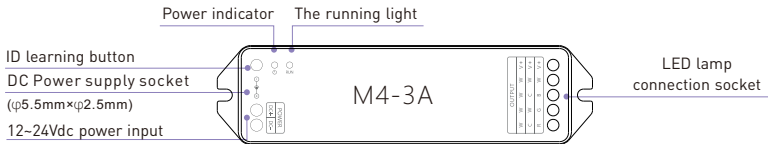

## Wiring Diagram :

