



ACCESSORIES

Wago Connectors

Features

- Most universal butt connector
- Gel-filled for moisture resistance and for PIC cable applications
- Wire size : 26-19 AWG
- Maximum operating temperature : 105°C
- Application: Low voltage lighting system including up-lighters and downlighters. HVAC control circuit, Junction boxes in-wall or ceiling, Mobile homes.
- Polypropylene, UL listed, Cat. 5

Specification

*Unit : mm

Item Code	Model	No.of Ways	Rated voltage(V)	Packaging Type
SA921	UY2	2	550	100ea /1 Box
SA922	UR2	3	550	100ea /1 Box


Technical Characteristics

Maximum Insulation O.D	2.08MM/0.82"
Wire(AWG)	26-19 AWG
Wire Type	0.4 – 0.9mm

Environmental requirements


Maximum operating temperature	105 °C
-------------------------------	--------

Certification



Physical Characteristics

Profile Drawings

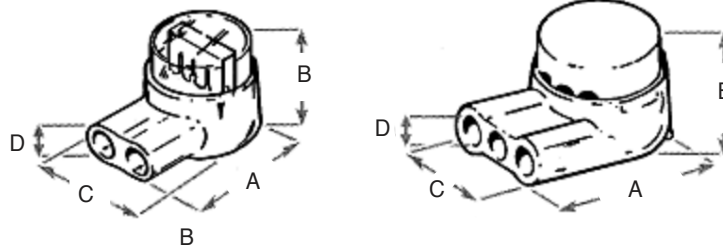

Dimensions (mm)

Item Code	No.of Ways	A	B	C	D	Weight(Kg)
SA921	2	15.5	5.8	9.9	2.1	0.112 g
SA922	3	17.6	5.8	12.4	2.08	0.114 g