

IP65 WITH SILICONE COATING

LED STRIP LIGHTING


SA FlexA WS 60 Series

Features

- Highest quality genuine 3M adhesive tape backing
- Cuttable each 3 LEDs, can be formed into any shapes
- Fast and easy installation.
- IP65 Weatherproof.
- 5 Years Warranty

Specification

Item Code	Colour	CCT(K)/Wavelength	Luminous Flux(lm)	Efficacy(lm/W)
SA 14214	BLUE	465	99	20.6
SA 14213 ^o	RED	625	156	30




Technical Characteristics

Power Consumption	4.8W/M / 5.2W (Red Only)
Voltage	DC12V
Current Dissipation	0.4A
Viewing Angle	120°
IP Rating	IP65
CRI (Ra)	80+
LED Type	3528 LED
Cuttable Length	Every 3 LEDs / 50mm
Number of LED	60EA/M (300 LEDs)

Certification



IP Rating



Temperature Ranges


Operating temperature	-20~60°
Storage temperature	-30~70°

Warranty

Warranty	5 years
----------	---------

Physical Characteristics

Dimensions(W*H*M)	10*2.5*5000
Weight	118g

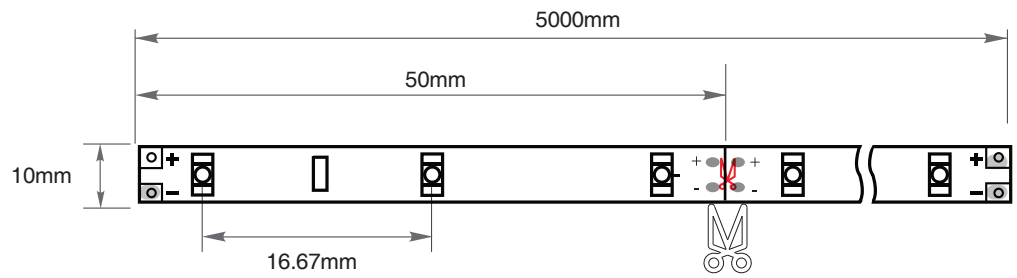

Max in series **5 Metre**

*Up-to 5 metre in a single series

