



ACCESSORIES

Wago Connectors

Features

- Ease of use – pull the lever up, insert a conductor and push the lever back down
- Available as 2-, 3- and 5-wire connectors
- Easily terminate conductors from 0.14 to 4 mm²
- Connect solid, stranded and fine-stranded conductors
- Minimize space consumption in the junction box by 40%
- Quickly install devices with higher levels of power consumption

***Warning: Corrosion may occur when used near salt water and areas such as coastal regions**

Specification

*Unit : mm

Item Code	No.of Ways	Rated voltage(V)	Rated Current(A)	Packaging Type
SA926	2	600	20	100ea /1 Box
SA927	3	600	20	50ea /1 Box
SA928	5	600	20	25ea /1 Box

Electrical data

Ratings per IEC/EN

Ratings per	EN 60664
Rated surge voltage (II/2)	4 kV
Legend (ratings)	(II / 2) Overvoltage category II / Pollution degree 2

Certification



Connection data

Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Nominal cross-section	4 mm ²
Solid conductor	0.2 ... 4 mm ² / 24 ... 12 AWG
Stranded conductor	0.2 ... 4 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.14 ... 4 mm ² / 24 ... 12 AWG
Strip length	11 mm / 0.43 inch
Wiring direction	Side-entry wiring

Material data


Color	Transparent
Flammability class per UL94	V2
Color of actuator	orange

Environmental requirements

Surrounding air temperature (operation)	85 °C
Continuous operating temperature	105 °C
Temperature marking per EN 60998	T85

Physical Characteristics

Profile Drawings

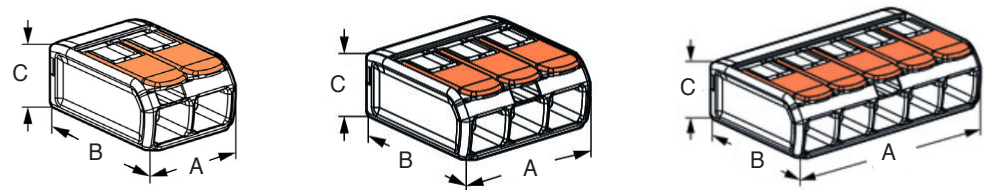

Dimensions (mm)

Item Code	No.of Ways	A(Width)	B(Depth)	C(Height)	Weight(Kg)
SA926	2	13.2	18.8	8.6	1.7g
SA927	3	18.8	18.8	8.6	2.5g
SA928	5	30	18.8	8.6	4g