

# Reliable savings, lasting brightness

## SmartBright LED Batten

SmartBright LED Batten G2 is an affordable replacement for T5 and T8 batters in indirect lighting solutions, such as pelmet or cove lighting. The product comes in a variety of lengths, and an excellent lifetime of 30,000 hours. The product also comes with a plug in the packaging, so is easy for installation.

### Benefits

- Slim and narrow end cap designed for cove and shelf lighting
- 5 lengths, 3 colours, flexible, mix and match
- Power cable included for easier purchase

### Features


- Patented glass diffuser
- Better heat conduction, no embrittlement, no yellowing
- Longer life time
- 30,000 hours
- Higher energy-efficiency
- 79lm/w
- Lower TCO vs. TL5 batten triggered to replace conventional batten more easily

### Application

- Shop Window Cove Shelf Convenience Store Freezer

# SmartBright LED Batten

## Versions

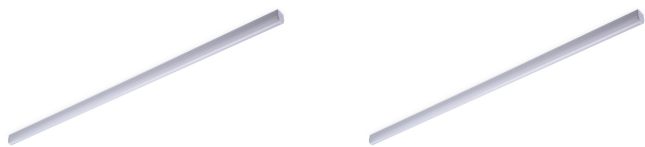

### Application Conditions

Ambient temperature range	-20 to +35 °C
Average ambient temperature	25 °C
Maximum dim level	Not applicable

### Approval and Application

Mech. impact protection code	IK02
Ingress protection code	IP20

### Controls and Dimming

Dimmable	No
----------	----

### Operating and Electrical

Input Voltage	220-240 V
---------------	-----------

### General Information

CE mark	CE mark
Driver included	Yes
ENEC mark	-
Flammability mark	-
Light source replaceable	No
Optic type	-
UL mark	-

### Initial Performance (IEC Compliant)

Init. Color Rendering Index	80
Luminous flux tolerance	+/-10%
Initial input power	21 W

### Mechanical and Housing

Color	White
-------	-------

### Initial Performance (IEC Compliant)

order code	Init. Corr. Color Temperature
911401840199	4000 K
911401840299	6500 K
911401840599	4000 K
911401840699	6500 K
911401840999	4000 K
911401841099	6500 K

