

SPECIFICATION

SS-36A Series LED Driver

Model: SS-36A-XX

Description: 36W LED DRIVER

Rev.: V01

Release Date: 2018-04-27



Features

- Efficiency up to 89%
- IP67 rated; Suitable for Dry, Damp and Wet Locations
- Protections: OVP, SCP, OTP, OCP
- Metal case with full potted for hazardous scenarios
- Surge Protection: L/N-PE: 6kV, L-N 4kV
- 5 years warranty



Description

SS-36A series are constant voltage LED driver with universal input voltage 90-305Vac and high power factor. They are specifically designed for LED strips, LED sign, billboard and landscape lighting with low standby power, high efficiency, compact housing and good thermal management, which greatly enhance the reliability and lifespan. Comprehensive protections, including Over Voltage Protection, Short Circuit Protection ensure proper functioning.

Model List

Model	O/P Voltage	O/P Current	Max. O/P Power	O/P Voltage Tolerance	THD (Typ.)	PF (Typ.)	Efficiency (Typ.)
SS-36A-12	12V	3A	36W	±5%	8%	0.95	85%
SS-36A-24	24V	1.5A	36W	±5%	8%	0.95	88%

Note: Default Tested at 230Vac, full load, Ta 25°C.

Input Characteristics

Parameter	Min	Typ.	Max	Remarks
Rated AC input range	100Vac		277Vac	
AC input range	90Vac		305Vac	
Input frequency range	47Hz		63Hz	
Max input current			0.6A	90Vac, full load
Inrush current			40A	Cold start, 230Vac/50Hz , Twidth=450us measured at 50% Ipeak
No load power		0.6W	1W	277Vac/50Hz, No load
Power factor	0.92	0.95		230Vac/50Hz, full load
	0.90	0.92		100-277Vac/50Hz, 75-100% Load
THD		8%	10%	230Vac/50Hz, full load
			20%	100-277Vac/50Hz, 75-100% Load

Output Characteristics

Parameter	Min	Typ.	Max	Remarks	
Output voltage range	SS-36A-12	11.40V	12.0V	12.60V	full load
	SS-36A-24	22.80V	24.0V	25.20V	
Output current range	SS-36A-12	0		3A	
	SS-36A-24	0		1.5A	
Efficiency @230Vac	SS-36A-12	83%	85%		Output 12V/3A, see Fig. 5 Output 24V/1.5A , see Fig. 5
	SS-36A-24	86%	88%		
Output voltage tolerance	-5%		+5%	full load	
Output voltage ripple (PK-PK)		1%	2%	Oscilloscope/20MHz, output with a 0.1uf ceramic capacitor and a 10uf electrolytic capacitor	
Start-up time		0.6S	0.75S	115Vac	
		0.3S	0.5S	230Vac	
Output overshoot/undershoot	-10%		+10%	When the driver on or off	
Line Regulation	-1%		+1%	Full load	
Load Regulation	-2%		+2%		
Transient response	Overshoot amplitude	-5%		+5%	di/dt=1A/μs, 25%-75%-25%
	Recover time			10ms	

Other Characteristics

Parameter		Min	Typ.	Max	Remarks
Protection	OCP	115% I _o		140% I _o	Hiccup mode
	OVP	105% V _o		130% V _o	The output voltage will be limited at the design range
	OTP	90°C	100°C	110°C	T _c case, recovers automatically after fault condition is removed
	Short Circuit Protection	Driver will not damaged with short-circuit power <10W			Hiccup mode
Life time			55,000hrs		230Vac, full load, T _c 75°C, See Fig. 6
MTBF			200,000hrs		230Vac, full load, T _a = 25°C, (MIL-HDBK-217F)
Temperature Coefficient		-0.03%/°C		+0.03%/°C	T _c : 0°C ~ 90°C
T _c				90°C	
Warranty			5 years		T _c : 75°C
Net Weight			450g		
Dimension		139.8mm*46.5mm*31.4mm			L x W x H

NOTE: All the parameters above are tested T_a 25°C, unless specified.

Environmental Requirements

Parameter	Min	Typ.	Max	Remarks
Operating Temperature	-40°C	25°C	+60°C	See Fig. 2
Storage Temperature	-40°C	25°C	+85°C	
Operation Humidity	10%RH		90%RH	
Storage Humidity	5%RH		95%RH	
Altitude	-65m		4,000m	
Cooling Method	Air Cooling			

Safety and EMI/EMS Standards

Certification	Standard	Status	Remark
UL/CUL	UL8750	√	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	√	
Item	Standard	Remark	
Insulation strength	Input-output	3750Vac/10mA Max/60s	
	Primary-Earth	1875Vac/10mA Max/60s	
	Sec.- Earth	1000Vac/10mA Max/60s	
Insulation resistance	Input-output	≥10MΩ	
	Ground resistor	≤0.1Ω	
Leakage current	≤0.75mA	25A/1min	
		277Vac	
Item	Criterion	Remark	
Conduction Emission	EN55015:2013+A1:2015		
Radiation Emission	EN55015:2013+A1:2015		
Harmonic Current Emissions	IEC/EN 61000-3-2	Class C	
Surge	IEC/EN61000-4-5	Difference mode 4kV, Common mode 6kV Criterion B	

NOTE: SOSEN warrants the LED Driver itself complies with EMC standard. However, LED Driver's EMC should be re-checked when integrated into lighting systems due to unexpected interference as component.

Performance Curves

Fig. 1 O/P Voltage VS Output Current

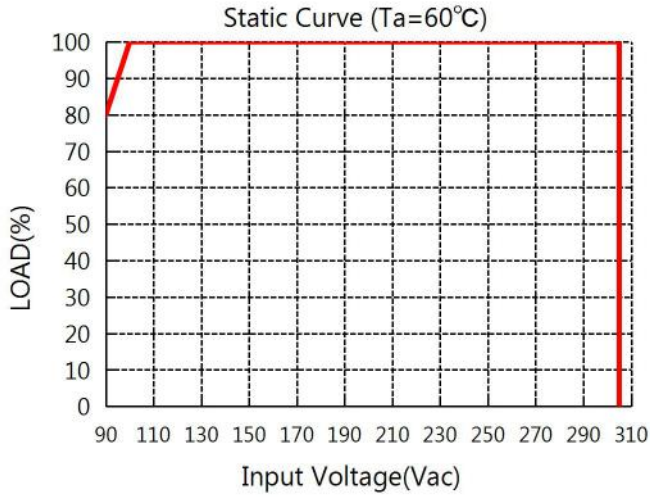


Fig. 2 O/P Power VS Ambient Temperature

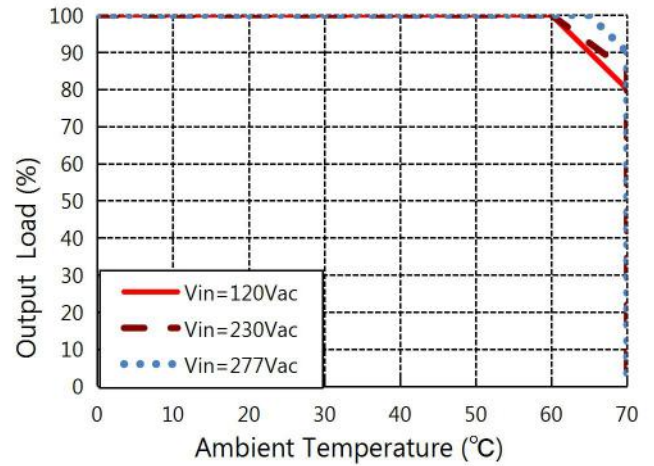


Fig. 3 Power Factor VS Output Power

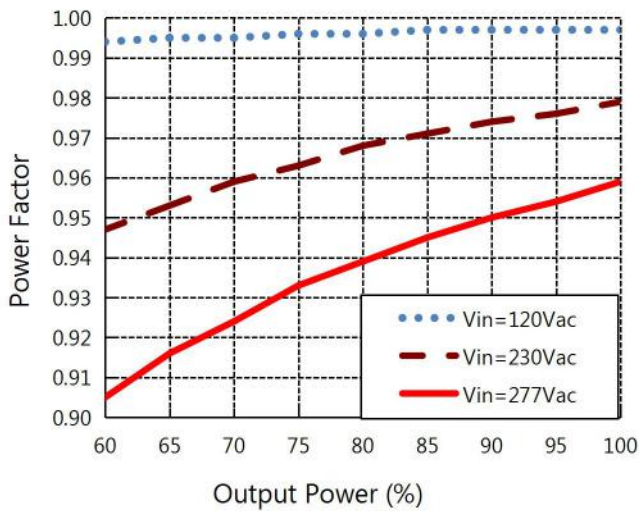


Fig. 4 THD VS Output Power

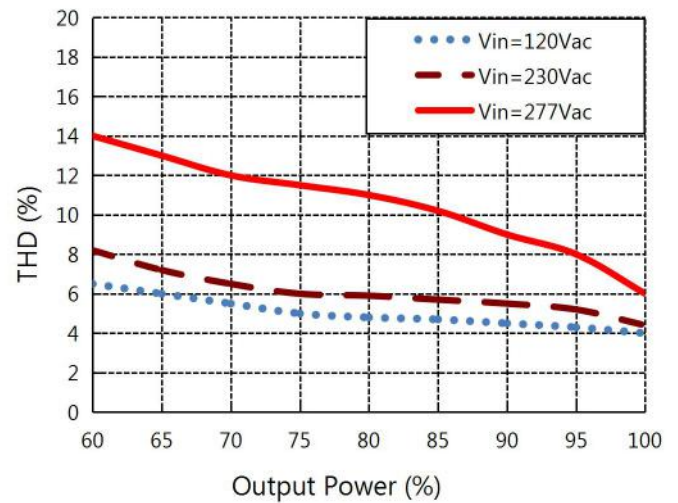


Fig. 5 Efficiency VS Output Power



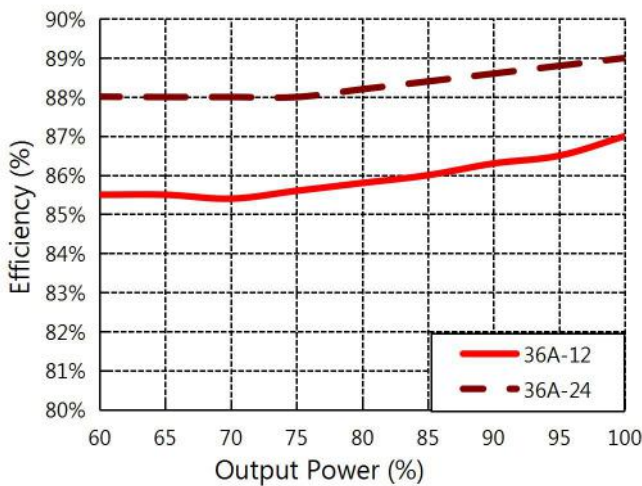


Fig. 6 Lifespan VS Case Temperature

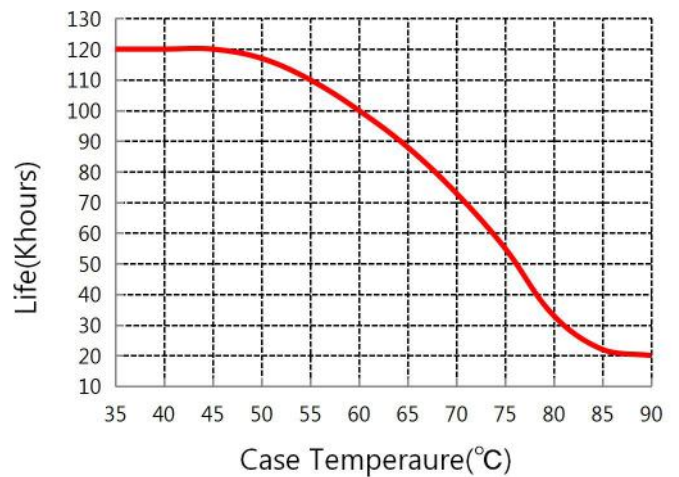

Mechanical Characteristics(Unit: mm)

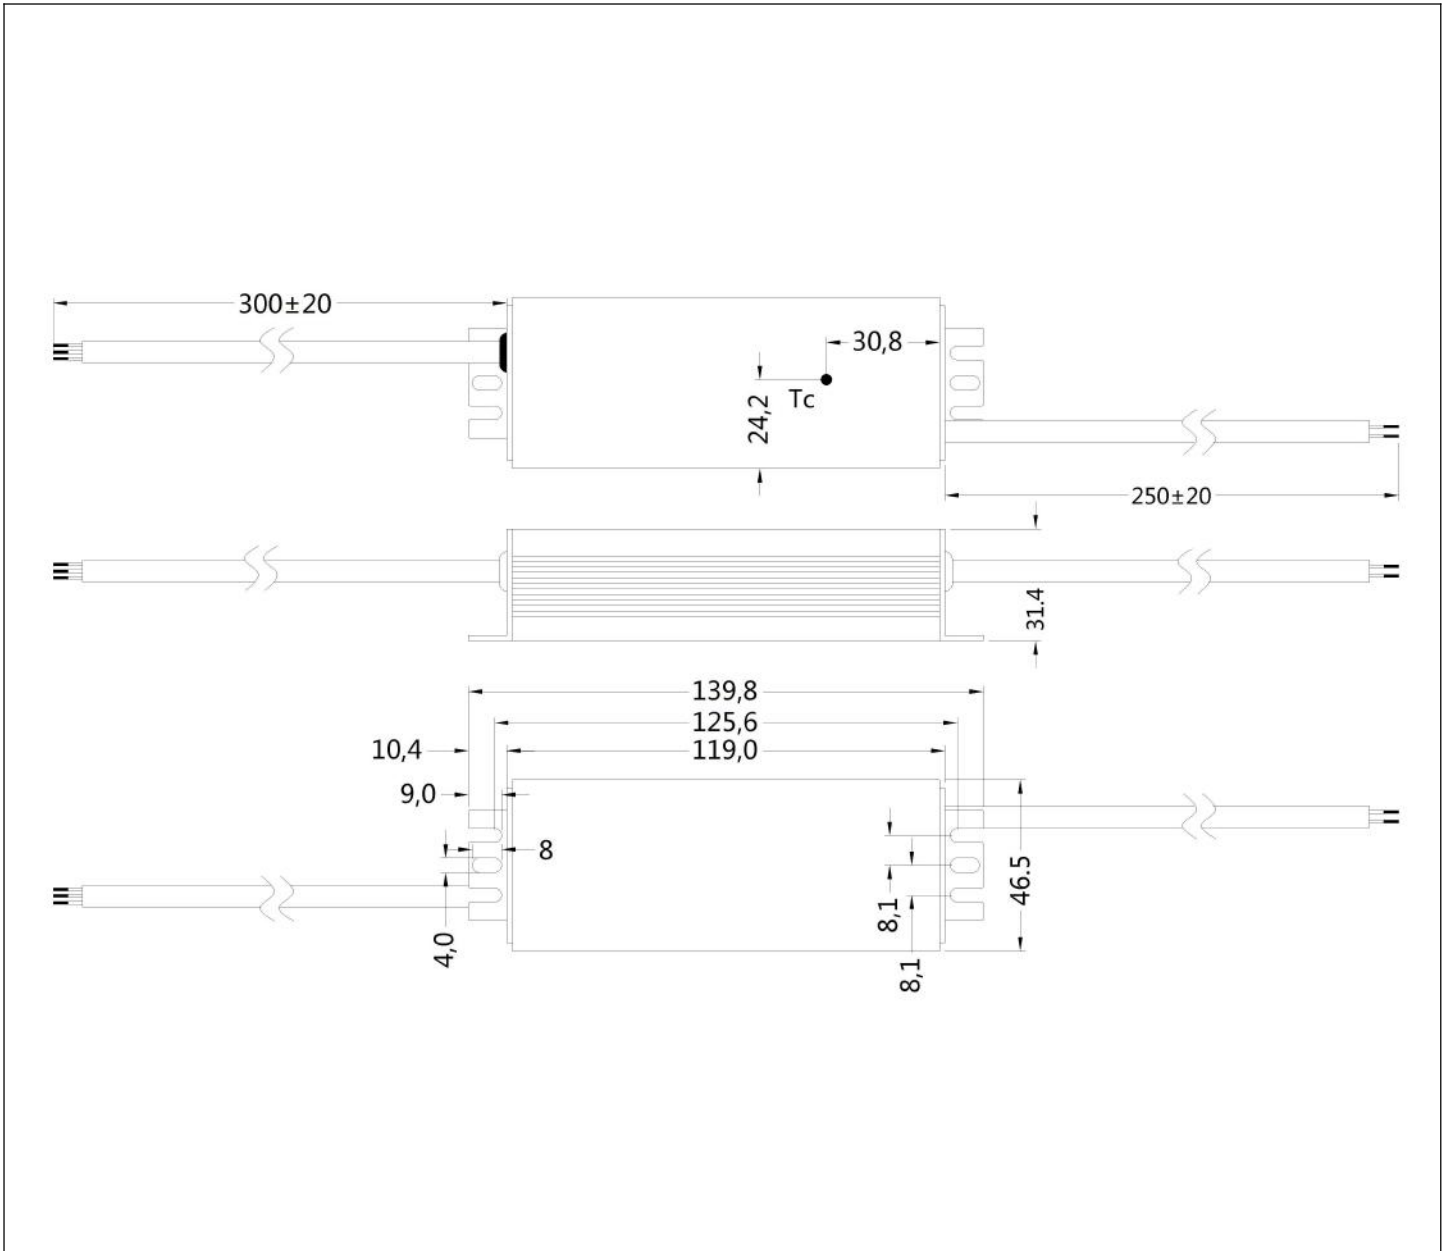

NOTE:


Input Wire	UL SJTW #18AWG 3*0.824 mm ² , O.D: 7.8mm, GREEN: PE, BLACK: L, WHITE: N
Output Wire	UL SJTW #18AWG 2*0.824, O.D: 7.6mm, RED: V+, BLACK: V-

Label

UL

INPUT

- ACL---BLACK
- ACN---WHITE
- ⊕---GREEN



MODEL:SS-36A-12
LED Driver

Shenzhen Sosen Electronics Co.,Ltd

INPUT : 100-277V ~ Max.0.6A 50/60Hz PF>0.95


OUTPUT : 12V == 3A 36W Type HL

Suitable for Dry, Damp and Wet Locations


OUTPUT

- V+ ---RED ○
- V- ---BLACK ○

MADE IN CHINA
www.szsosen.com



RoHS SELV IP67

SOSEN LED DRIVER 

Package, Transportation & Storage

1. Package

- Outside carton dimension: L×W×H =500mm×390mm×170mm;
- 30PCS/Carton;
- Net weight/PC: 0.45kg;
- Gross weight/Carton: 14.5kg.

2. Transportation

Packaging is designed suitable for transportation by trucks, vessels and flights. The products should be shielded from direct sunshine, loaded/unloaded with caution.

3. Storage

The product storage meets the standard of the GB 3873—83.

Products should be rechecked if stock for over 1 year before installation.