

SAled LED Module

SA LX-HLC3S W65K



IP68



SPECIFICATION

- High Efficiency SAMSUNG LED 2835pkg
- Excellent Protection Rate against Rain, Direct Light & Ultraviolet Rays
- Evolution to Sophisticated & Innovative design
- 5 years Warranty
- Made in Korea



OPTICAL CHARACTERISTICS

Available Color	Luminous Flux(lm)	CCT (Kelvin)	CRI(Ra)	Viewing Angle
Pure White	72	6,500	80	120°

ELECTRICAL CHARACTERISTICS

Current dissipation : 60mA
 Power Consumption : 0.72W
 Operating power : DC 12V
 IC Chip-on-board current regulation
 Electronic dimming control supported


Module Layout guides

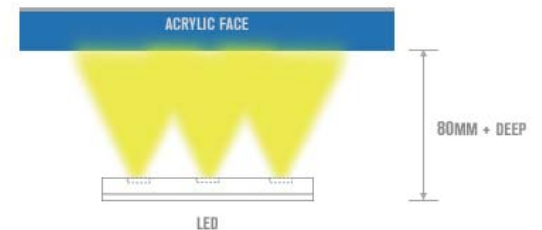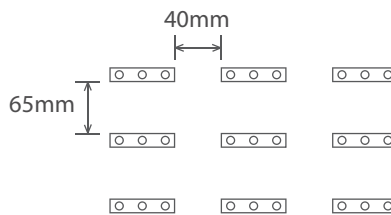

THERMAL

Operating temperature : -20~50°C
 Storage temperature : -30~70°C


Up-to 50 modules in a single series

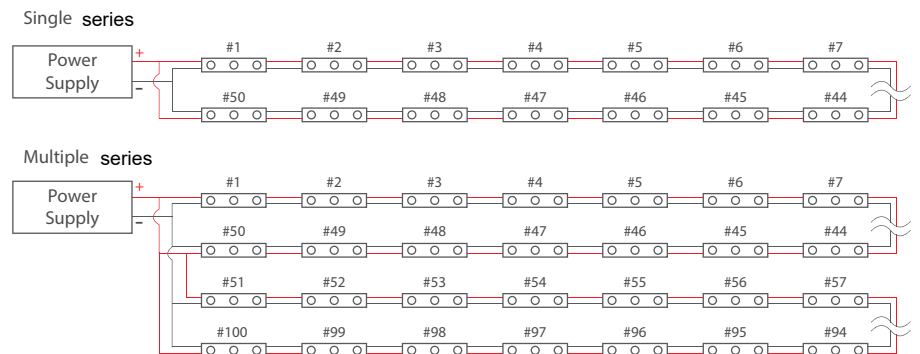

CONSTRUCTION

Cover : ABS
 Case : ABS-HI121, HB-class
 Lead wire : AWG18

PHYSICAL CHARACTERISTICS



Height : 8.2mm
 Weight : 9.5g