



LED STRIP LIGHTING

SA FWS Series

Features

- Outdoor & indoor use
- Weatherproof type(IP65) with Silicon coating
- Fast and easy installation
- Dimmer Compatibility
- Cuttable each 3 LEDs
- Highest quality genuine 3M adhesive tape backing
- Electronic dimming control supported.
- 5 years warranty

Specification


Item Code	Colour	CCT(K)	No. of LED	Luminous Flux(lm)	Efficiency
SA 74311	Pure White	6,500	60LED	1440	100m/W
SA 74342	Warm White	3,000	120LED	1512	105m/W
SA 74342-A	Warm White	4,000	120LED	1512	105m/W



Technical Characteristics

	60 LED	120 LED
Power Consumption	14.4W/M	14.4W/M
Voltage	DC12V	DC12V
Current Dissipation	1.2A	1.2A
IP Rating	IP67	IP67
Viewing Angle	120°	120°
CRI (Ra)	90+	90+
LED Type	2835T LED	2835T LED
Cuttable Length	Every 3 LEDs / 50mm	Every 3 LEDs / 25mm
Number of LED	60EA/M (300 LEDs)	120EA/M (600 LEDs)

IP Rating



Certification



Temperature Ranges

Operating temperature	-20~60°C
Storage temperature	-30~70°C


Warranty

Warranty	5years
----------	--------


Physical Characteristics

Dimensions(W*H*M)	10*2.5*5000
Weight	118g

60 LED SA 74311

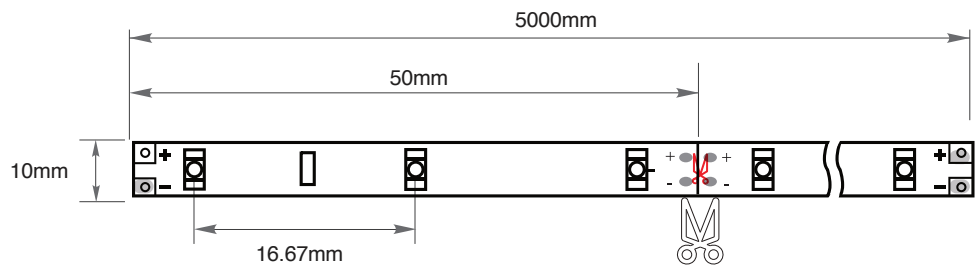


120 LED SA 74342, SA74342-A

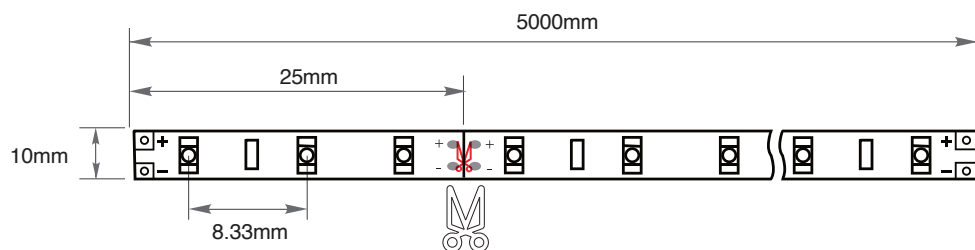

Max in series 5 Metre

*Up-to 5 metre in a single series

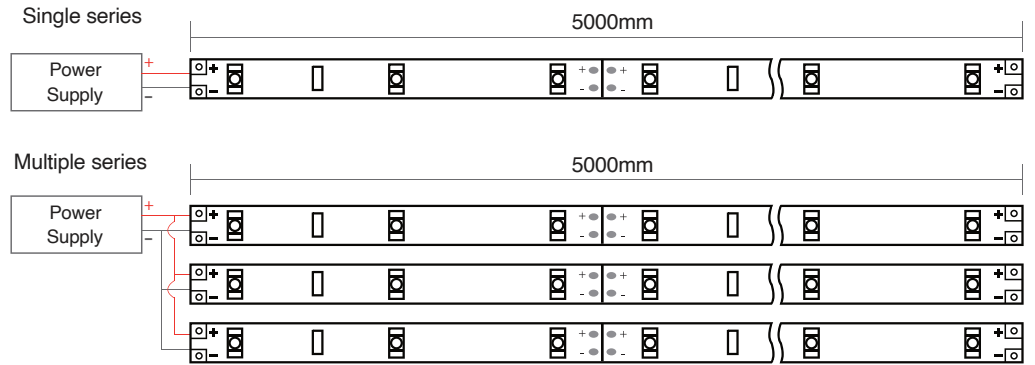

Lorem ipsum