



## LED LIGHTING

# LED Batten Light

### Features

- High quality opal PC cover and PC/ABS base offering IP65 protection against moisture, dust, corrosion and an impact rating of IK08;
- Long life energy SMD with constant current flicker or non-flicker driver;
- High luminous efficiency, low power consumption;
- Simple installation, no dark area, no noise.
- Emergency LED Batten available.
- 3 Years warranty.

### Specification

Item Code	Function	Power(W)	Colour	CCT(K)	Luminous Flux(lm)	Beam Angle
SL 81125	Emergency	40	PW	6,000	>4,400	120°
SL 81325	Non-Emergency	40	PW	6,000	>4,400	120°

### Technical Characteristics


Efficiency	110lm/W
Input Voltage	AC220V-240V
IP Rating	IP65
CRI (Ra)	80+
Number of LED	112
Lumen Maintenance	>30,000 hours

### Warranty






Warranty	3 Years
----------	---------
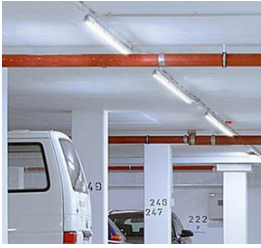
### Applications

- Lighting for supermarket, shopping mall, restaurant, school, hospital, parking lot, warehouse, and other public places.




## LED Indicator

				
<b>Red Stable</b>	<b>Red Flashing</b>	<b>Green Stable</b>	<b>Green Flashing</b>	<b>Red &amp; Green Off</b>
Charging mode	Failure as below <ul style="list-style-type: none"> <li>· Battery is not connected.</li> <li>· Battery is defective.</li> <li>· Load failure during emergency mode,</li> <li>· open circuit/ short circuit</li> <li>· Battery capacity abnormal</li> </ul>	Battery fully charged	Self-test underway	Discharging mode or mains supply disconnected

## Physical Characteristics


### Profile Drawings

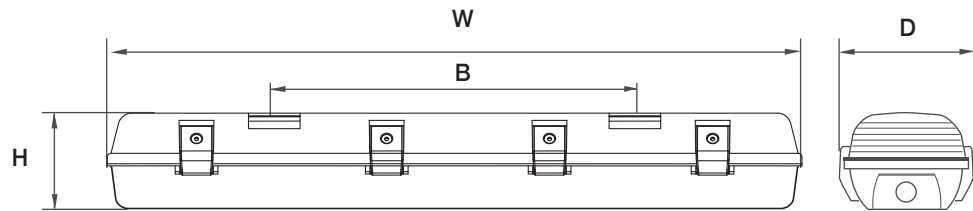


### Dimensions (mm)

Item Code	W(Width)	H(Height)	D(Depth)	B(Installation Size)	Weight(Kg)
SL 81125	1,265	165	110	907	3.5kg
SL 81325	1,265	165	110	907	3.5kg

## Accessories



Aluminum Mounts



Plastic Anchors



Screws