



## LED STRIP LIGHTING

# VL FlexA WT 120 Series

### Features

- Outdoor use only
- High efficacy of up to 100 Lm/w
- Silicone tube encased -IP67
- Cutable each 6 LEDs
- An easy installation featuring 3M adhesive backing.
- Electronic dimming control supported.
- 3 years warranty

### Specification

| Item Code  | Colour     | CCT(K) | Luminous Flux(lm) | Efficiency(lm/W) |
|------------|------------|--------|-------------------|------------------|
| VL 14341   | Pure White | 6,500  | 1400              | 97               |
| VL 14342   | Warm White | 3,000  | 1500              | 100              |
| VL 14342-A | Warm White | 4,000  | 1500              | 100              |

### Technical Characteristics


|                        |                     |
|------------------------|---------------------|
| Power Consumption      | 14.4W/M             |
| Voltage                | DC24V               |
| Current Dissipation(A) | 0.6A                |
| IP Rating              | IP67                |
| Viewing Angle          | 120°                |
| CRI (Ra)               | 90+                 |
| LED Type               | 2835 LED            |
| Cutable Length         | Every 6 LEDs / 50mm |
| Number of LED          | 120EA/M (600 LEDs)  |

### Certification




### Temperature Ranges

|                       |         |
|-----------------------|---------|
| Operating temperature | -20~60° |
| Storage temperature   | -30~70° |

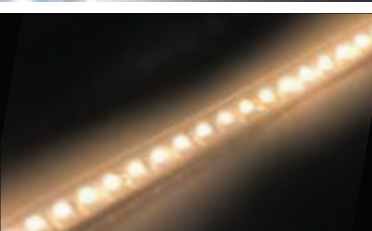

IP Rating




### Warranty


|          |         |
|----------|---------|
| Warranty | 3 years |
|----------|---------|

### Physical Characteristics

|                   |              |
|-------------------|--------------|
| Dimensions(W*H*M) | 10 *5.5*5000 |
| Weight            | 243g         |

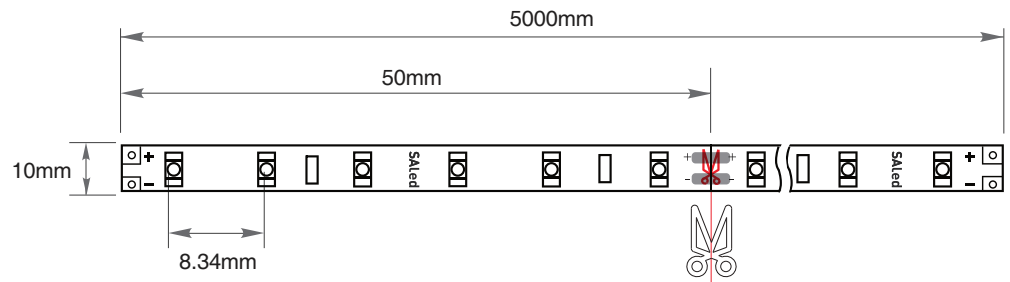

### Luminous intensity distribution diagram

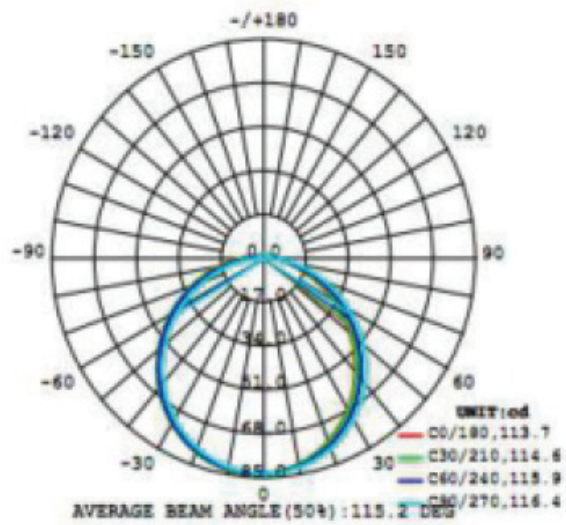

**Max in series 5 Metre**

\*Up-to 5 metre in a single series

