



LED STRIP LIGHTING

SA COB Strip Series

Features

- Chips-on-board design, dot free even without any profiles
- Excellent lighting with SDCM in 3-step.
- High Efficiency up to 110lm/W.
- 180° wide beam angle;
- Flexible with 3M back tape, easy for installation.
- 5 years warranty


Specification

| 15W | Item Code | CCT(K) | Current(A) | Luminous Flux(lm) | Efficiency(lm/W) |
|-----|------------|--------|------------|-------------------|------------------|
| | SA 9CSB1 | 6,500 | 0.625 | 1,650 | 110 |
| | SA 9CSB2 | 3,000 | 0.625 | 1,500 | 100 |
| | SA 9CSB2-A | 4,000 | 0.625 | 1,575 | 105 |
| 10W | Item Code | CCT(K) | Current(A) | Luminous Flux(lm) | Efficiency(lm/W) |
| | SA 9CUE1 | 6,500 | 0.417 | 840 | 84 |
| | SA 9CUE2 | 3,000 | 0.417 | 760 | 76 |
| | SA 9CUE2-A | 4,000 | 0.417 | 800 | 80 |

Technical Characteristics

| | |
|----------------|----------------------------|
| Voltage | DC24V |
| Efficiency | Up to 110lm/W |
| Colour | Pure White, Warm White |
| CRI (Ra) | 80+ |
| IP Rating | IP20 |
| Viewing Angle | 180° |
| Cutable Length | 15W - 45.45mm, 10W-11.36mm |
| Number of LED | 528EA/M (2,640 LEDs) |

IP Rating



Certification



Temperature Ranges


| | |
|-----------------------|---------|
| Operating temperature | -20~40° |
| Storage temperature | -20~45° |

Warranty

| | |
|----------|---------|
| Warranty | 5 Years |
|----------|---------|

Physical Characteristics

| | |
|-------------------------|--|
| Dimensions : mm (W*H*M) | 15W - 10 *1.6*5000 / 10W - 8 *1.6*5000 |
| Weight | 389g |

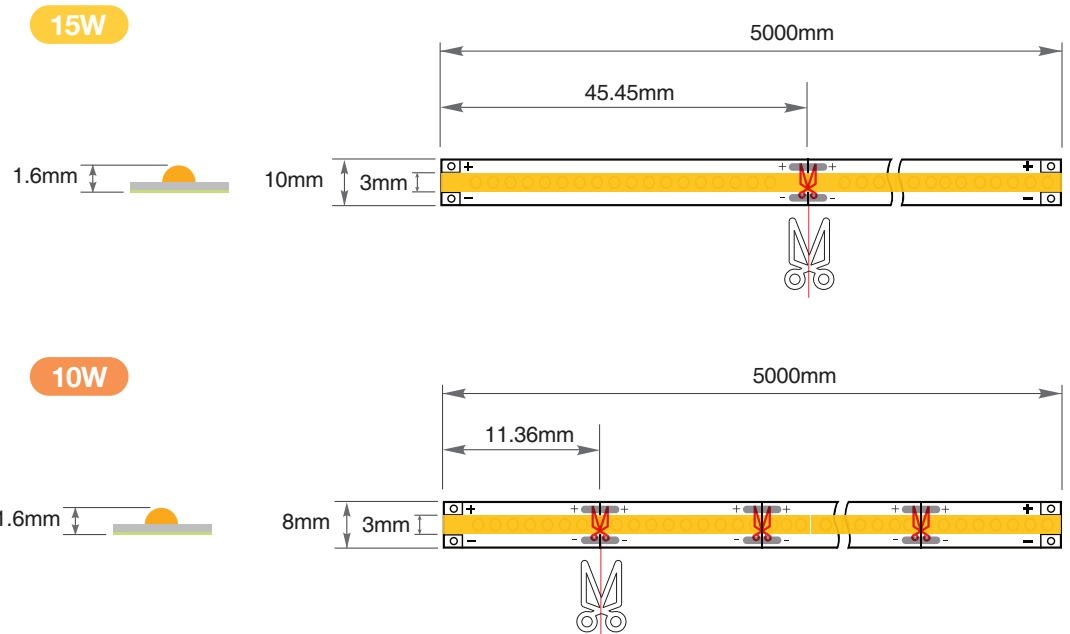

Max in series 5 Metre

