


\*50 METRE / ROLL



## ACCESSORIES

# LED WIRE UL 1007 Series

## Features

- Application: Internal wiring of appliances.
- Characteristics : Rating : 300V, 80°C
- Extruded construction, flat ribbon type wire.
- Certifications : AWM UL 1007 VW-1 FT1
- TIN\_COATED.
- Best for outdoor condition.

## Specification

\*Unit : mm

Item Code	Standard	No. of Core	No & Dia of Conductor*	Insulation Colour
SA9132	18 AWG	4C	41 TA / 0.157	White & Red & Green & Blue

## Technical Characteristics

Rated Voltage	80°
Rated Temperature	300V
Flame Retardant	UL VW-1, FT1
Insulation Material	PVC
Conductor Material	Copper
Material Shape	Flat Wire
Length	50 Metre /Roll


## Certification



## I Physical Characteristics

### Schematic Cross Section

Front view

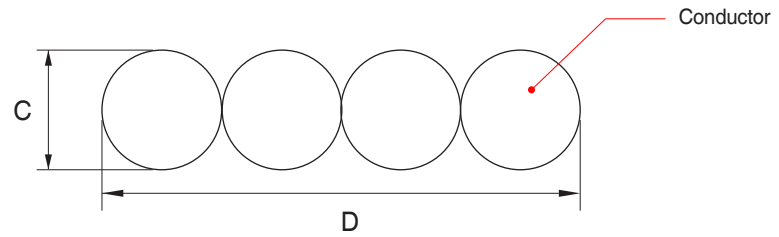

### Dimensions (mm)

\*Unit : mm

Item Code	Standard	No. of Core	Insulation Dia (C)*	Overall Outer (D)*
SA9132	18 AWG	4C	1.98 ± 0.03mm	7.92 ± 0.1mm