







#### **LED STRIP LIGHTING**

# **SA COB WT Strip Series**

### | Features

- · Chips-on-board design, dot free even without any profiles
- · Electronic dimming control supported
- High Efficiency up to 110Lm/W.
- 180° wide beam angle.
- · Silicone tube encased -IP67
- · Flexible with 3M back tape, easy for installation.
- 5 years warranty

## | Specification

| Item Code  | Colour     | CCT(K)/Wavelength | Luminous Flux(lm) | Efficiency(lm/W) |
|------------|------------|-------------------|-------------------|------------------|
| SA 99SB1   | Pure White | 6,500             | 1,650             | 110              |
| SA 99SB2   | Warm White | 3,000             | 1,500             | 100              |
| SA 99SB2-A | Warm White | 4,000             | 1,575             | 105              |

#### **Technical Characteristics**

| Power Consumption   | 15W/M                |
|---------------------|----------------------|
| Voltage             | DC24V                |
| Current Dissipation | 0.625A               |
| Efficiency          | up to 95lm/W         |
| CRI(Ra)             | 80+                  |
| IP Rating           | IP67                 |
| Viewing Angle       | 180°                 |
| Cuttable Length     | 45.45mm              |
| Number of LED       | 528EA/M (2,640 LEDs) |

#### Certification









## **Temperature Ranges**

| Operating temperature | -20~40° |
|-----------------------|---------|
| Storage temperature   | -20~45° |



For more information please contact

Tel: 07 3219 6711 E-mail: service@sa-led.com






#### Warranty


| Warranty | 5 Years |  |
|----------|---------|--|
|----------|---------|--|

# | Physical Charactericstics

| Dimensions : mm (W*H*M) | 12.5 *5*5000 |
|-------------------------|--------------|
| Weight                  | 400g         |

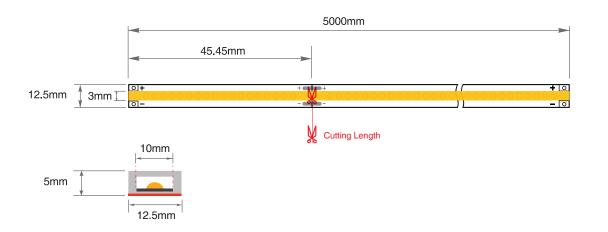

## Max in series 5 Metre





Tel: 07 3219 6711 E-mail: service@sa-led.com

