



## LED MODULES

# SA L-Mini LED(2835) Series

### Features

- Compact design and easy installation.
- Constant voltage & Reverse Protection Circuit
- Compatible.
- Diamondback 160° optic lens
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.
- LED Type: 2835 LED Chip
- 5Years Warranty

### Specification

Item Code	Type	Power(W)	Current Dissipation(A)	CCT(K)	Luminous Flux(lm)
SA 4101	1 LED	0.24	0.02	7,000	29
SA 4201	2 LED	0.48	0.04	7,000	55
SA 4301	3 LED	0.72	0.06	7,000	85

### Technical Characteristics

Voltage	DC12V
Viewing Angle	160°
Colour	PURE WHITE
IP Rating	IP67
CRI(Ra)	80+
LED Type	2835 LED

### Certification



### Temperature Ranges

Operating temperature	-25~60°
Storage temperature	-25~70°



### Warranty

Warranty	5 Years
----------	---------



## Physical Characteristics

### Profile Drawings


1 LED  
Weight : 2g

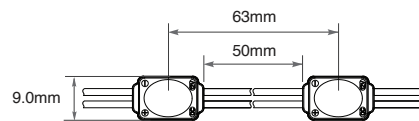

2 LED  
Weight : 3 g

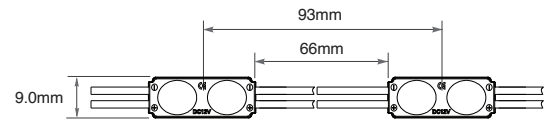


3 LED  
Weight : 4 g

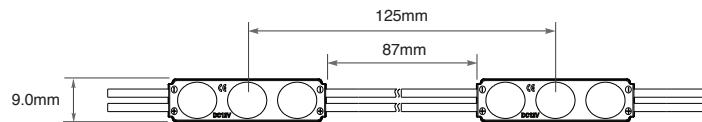


### Module Layout Guides


3 LED



2 LED




1 LED




## Max in series 50 EA

Single series



\*Up-to 50 modules in a single series



Multiple series

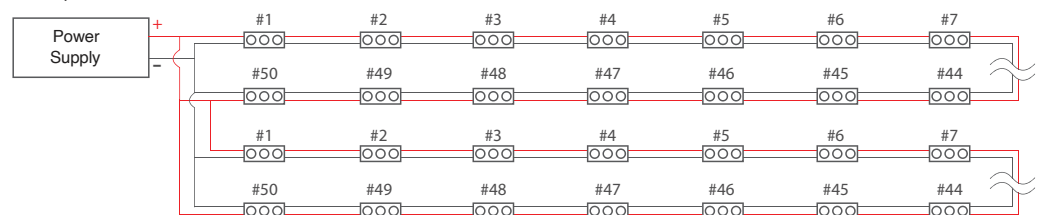

2LED - Max in series 50 EA

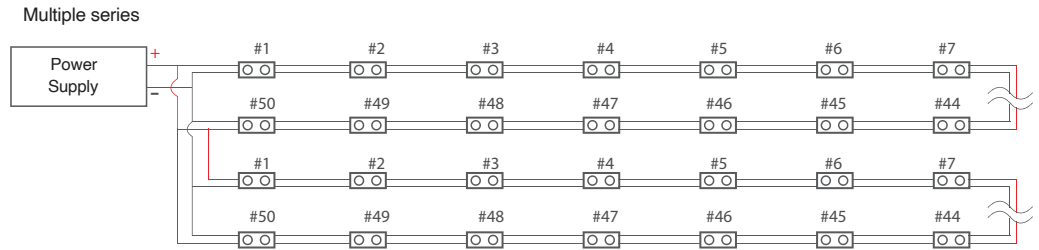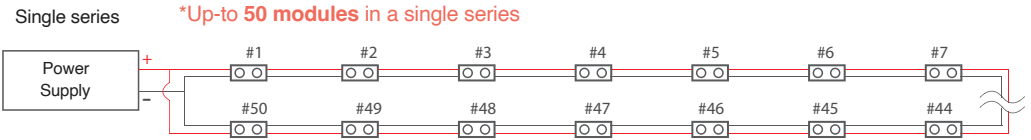

3LED - Max in series 50 EA

