



LED STRIP LIGHTING

SA W-COB LR Strip

Features

- Chips-on-board design, dot free even without any profiles
- Can be run in up to 20M length from one driver
- Can finish one end of the wire without voltage drop
- Flexible with 3M back tape, easy for installation.
- 5 years warranty

Specification

| Item Code | Colour | CCT(K) | Luminous Flux(lm) | Efficiency(lm/W) |
|-----------|------------|--------|-------------------|------------------|
| SA 9DUE1 | Pure White | 6,500 | 700 | 90 |
| SA 9DUE2 | Warm White | 3,000 | 630 | 90 |
| SA 9DUE3 | Red | - | 630 | 90 |
| SA 9DUE4 | Blue | - | 630 | 90 |

Technical Characteristics

| | |
|---------------------|----------------------|
| Power Consumption | 7W/M |
| Voltage | DC24V |
| Current Dissipation | 0.29 |
| Efficiency(lm/W) | Up to 100 lm/W |
| CRI (Ra) | 80+ |
| IP Rating | IP20 |
| Cutttable Length | 50mm |
| Number of LED | 360EA/M (7,200 LEDs) |

Certification




Temperature Ranges

| | |
|-----------------------|---------|
| Operating temperature | -20~40° |
| Storage temperature | -20~45° |

Warranty


| | |
|----------|---------|
| Warranty | 5 Years |
|----------|---------|

IP Rating



Physical Characteristics

| | |
|-------------------------|---------------|
| Dimensions : mm (W*H*M) | 10 *1.6*20000 |
| Weight | 490g |

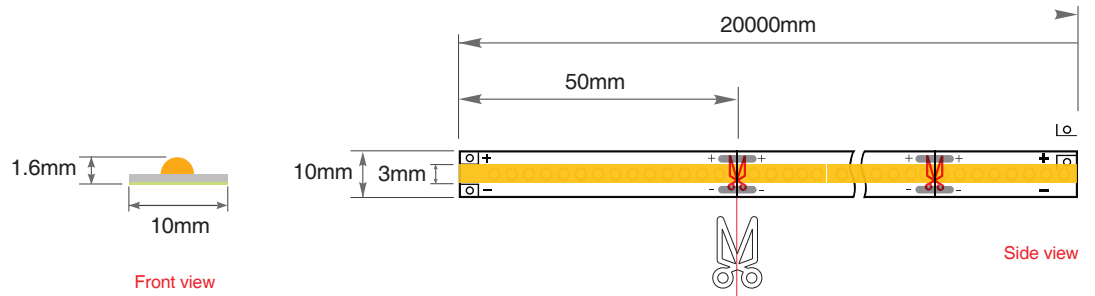

Max in series 20 Metre

