




*50 METRE / ROLL

ACCESSORIES

LED WIRE UL 2468 Series

Features

- Application: Internal wiring of appliances.
- Characteristics : Rating : 300V, 80°C
- Extruded construction, flat ribbon type wire.
- Certifications : AWM UL 2468 VW-1 FT1
- TIN_COATED.
- Best for outdoor condition.



Specification

*Unit : mm

Item Code	Standard	No. of Core	No & Dia of Conductor*	Insulation Colour
SA915	16 AWG	2C	26 TA / 0.254	White & Red
SA913	18 AWG	2C	41 TA / 0.157	White & Red
SA9131	18 AWG	2C	41 TA / 0.16	Nude & Black
SA917	22 AWG	2C	17 TA / 0.16	White & Red
SA9171	22 AWG	2C	17 TA / 0.16	Nude & Black

Technical Characteristics

Rated Voltage	80°
Rated Temperature	300V
Flame Retardant	UL VW-1, FT1
Insulation Material	PVC
Conductor Material	Copper
Material Shape	Flat Wire
Length	50 Metre /Roll


Certification



Physical Characteristics

Schematic Cross Section

Front view

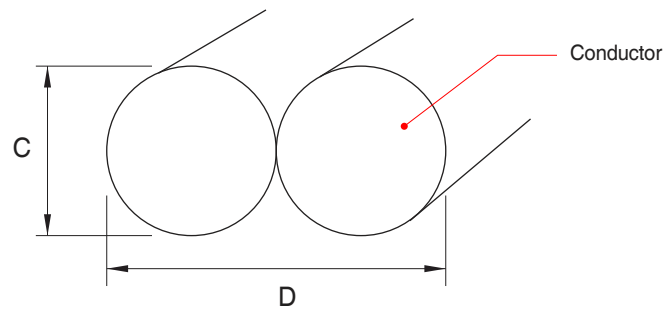

Dimensions (mm)

*Unit : mm

Item Code	Standard	Insulation Dia (C)*	Overall Outer (D)*
SA915	16 AWG	2.9 ± 0.1mm	6.2 ± 0.1mm
SA913	18 AWG	2.0 ± 0.05mm	4.2 ± 0.1mm
SA9131	18 AWG	2.0 ± 0.05mm	4.2 ± 0.1mm
SA917	22 AWG	1.62 ± 0.05mm	3.40 ± 0.1mm
SA9171	22 AWG	1.62 ± 0.05mm	3.40 ± 0.1mm