


*50 METRE / ROLL



ACCESSORIES

LED WIRE UL 1007 Series

Features

- Application: Internal wiring of appliances.
- Characteristics : Rating : 300V, 80°C
- Extruded construction, flat ribbon type wire.
- Certifications : AWM UL 1007 VW-1 FT1
- TIN_COATED.
- Best for outdoor condition.

Specification

*Unit : mm

Item Code	Standard	No. of Core	No & Dia of Conductor*	Insulation Colour
SA 9132	18 AWG	4C	41 TA / 0.157	White & Red & Green & Blue
SA 9172	22 AWG	4C	17 TA / 0.157	White & Red & Green & Blue

Technical Characteristics


Rated Voltage	80°
Rated Temperature	300V
Flame Retardant	UL VW-1, FT1
Insulation Material	PVC
Conductor Material	Copper
Material Shape	Flat Wire
Length	50 Metre /Roll

Certification



I Physical Characteristics

Schematic Cross Section

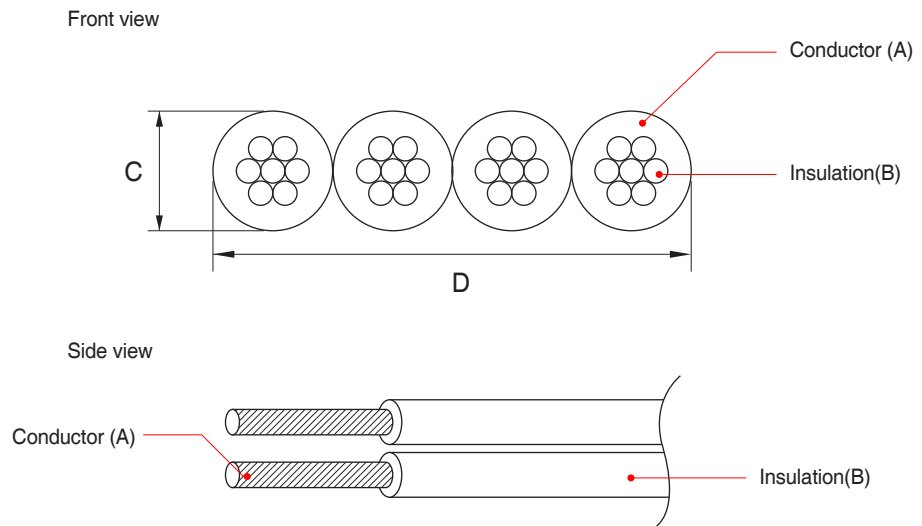

Dimensions (mm)

*Unit : mm

Item Code	Standard	No. of Core	Insulation Dia (C)*	Overall Outer (D)*
SA9132	18 AWG	4C	1.98 ± 0.03mm	7.92 ± 0.1mm
SA9172	22 AWG	4C	1.98 ± 0.03mm	7.92 ± 0.1mm