
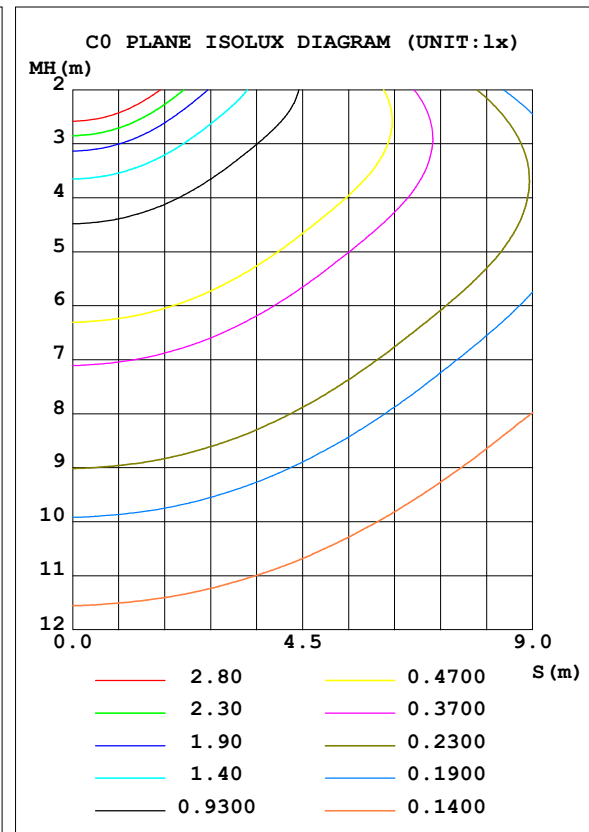


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 88.77 lm/W			
MODEL		I _{max} (cd)	78.00	S/MH (C0/180)	2.20
NOMINAL POWER (W)	3	LOR (%)	100.0	S/MH (C90/270)	2.06
RATED VOLTAGE (V)	220.0	TOTAL FLUX (lm)	266.32	η UP, DN (C0-180)	3.5, 45.0
NOMINAL FLUX (lm)	266.318	CIE CLASS	DIRECT	η UP, DN (C180-360)	4.0, 47.6
LAMPS INSIDE	1	η up (%)	7.4	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	220.0	η down (%)	92.6	CIBSE SHR MAX	0.00

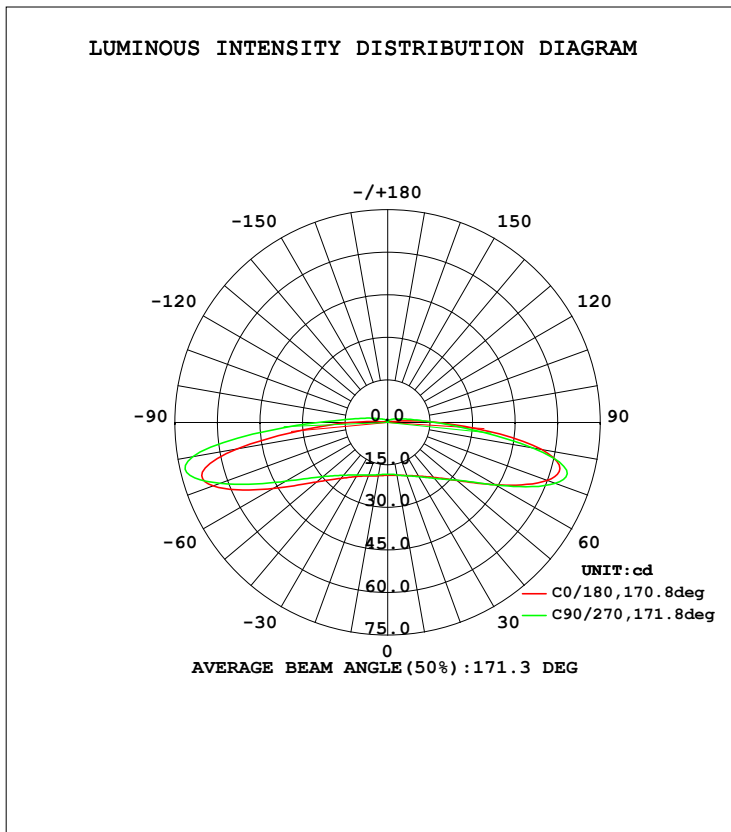

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: MARWAN
 Test Date: 2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity: 65.0%
 Test Distance: 6.280m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	18.96	18.91	18.79	18.64	19.11	18.94	18.73	18.51	0- 10	1.774	1.774	0.67,0.67
20	19.96	20.09	20.05	19.84	20.10	20.02	19.73	19.36	10- 20	5.482	7.255	2.72,2.72
30	21.88	21.97	22.13	22.03	22.06	21.86	21.41	21.18	20- 30	9.616	16.87	6.34,6.34
40	25.34	25.14	25.77	25.91	25.78	25.16	24.35	24.50	30- 40	14.69	31.56	11.9,11.9
50	31.86	31.17	31.72	33.01	32.69	31.02	29.75	30.84	40- 50	21.71	53.27	20,20
60	43.98	43.40	44.17	45.81	46.56	43.41	41.49	42.80	50- 60	33.22	86.49	32.5,32.5
70	59.87	62.31	62.89	61.23	65.51	66.18	62.84	60.12	60- 70	53.00	139.5	52.4,52.4
80	55.14	56.87	52.01	43.47	53.76	67.80	69.76	59.06	70- 80	68.25	207.7	78,78
90	17.63	19.35	16.76	11.72	13.23	21.91	24.52	20.22	80- 90	38.77	246.5	92.6,92.6
100	2.229	7.598	7.035	2.114	1.630	8.115	8.893	4.362	90-100	11.01	257.5	96.7,96.7
110	0.9996	3.804	3.761	1.215	0.9959	3.782	4.255	1.484	100-110	3.944	261.5	98.2,98.2
120	0.7668	2.418	2.545	0.9449	0.7548	2.319	2.511	1.033	110-120	2.017	263.5	98.9,98.9
130	0.5201	1.606	1.681	0.6893	0.5367	1.696	1.828	0.7432	120-130	1.263	264.7	99.4,99.4
140	0.3504	1.235	1.318	0.4366	0.3300	1.289	1.317	0.5334	130-140	0.7785	265.5	99.7,99.7
150	0.2528	0.9478	1.005	0.2700	0.2154	1.042	1.053	0.2553	140-150	0.4831	266.0	99.9,99.9
160	0.1867	0.4378	0.5288	0.1810	0.1690	0.5737	0.6276	0.1826	150-160	0.2353	266.2	100,100
170	0.1694	0.1666	0.1666	0.1579	0.1508	0.1664	0.1663	0.1542	160-170	0.0663	266.3	100,100
180	0.1493	0.1464	0.1436	0.1436	0.1493	0.1464	0.1436	0.1436	170-180	0.0148	266.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.93
1.0	.89	.81	.74	.86	.79	.72	.80	.74	.68	.74	.69	.65	.69	.65	.61	.58
2.0	.71	.60	.51	.68	.58	.50	.63	.55	.47	.58	.51	.45	.54	.48	.43	.39
3.0	.59	.47	.37	.56	.45	.36	.52	.42	.35	.48	.40	.33	.44	.37	.31	.28
4.0	.50	.38	.29	.48	.37	.28	.44	.34	.27	.41	.32	.25	.37	.30	.24	.21
5.0	.43	.32	.23	.42	.31	.22	.38	.29	.21	.35	.27	.20	.32	.25	.19	.16
6.0	.38	.27	.19	.37	.26	.18	.34	.24	.18	.31	.23	.17	.29	.22	.16	.13
7.0	.34	.23	.16	.33	.23	.15	.30	.21	.15	.28	.20	.14	.26	.19	.13	.11
8.0	.31	.21	.14	.30	.20	.13	.27	.19	.13	.26	.18	.12	.24	.17	.11	.09
9.0	.28	.18	.12	.27	.18	.12	.25	.17	.11	.23	.16	.11	.22	.15	.10	.08
10.0	.26	.16	.10	.25	.16	.10	.23	.15	.10	.22	.14	.09	.20	.14	.09	.07

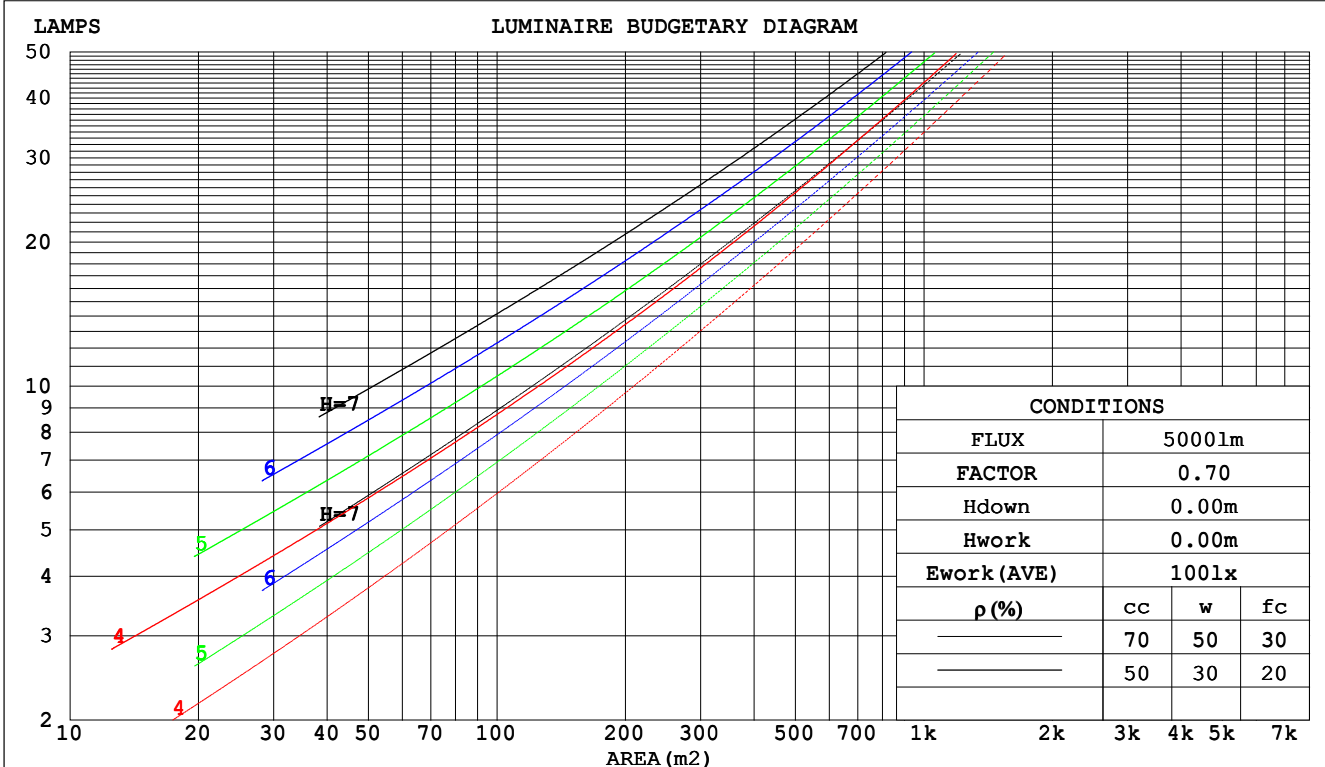

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.561	.319	.101	.551	.314	.100	.532	.305	.097	.515	.297	.095	.499	.289	.093	
2.0	.460	.252	.077	.451	.248	.076	.434	.241	.075	.418	.234	.073	.403	.228	.072	
3.0	.391	.208	.062	.382	.205	.062	.367	.199	.060	.353	.193	.059	.339	.188	.058	
4.0	.339	.176	.052	.331	.173	.051	.317	.168	.050	.304	.164	.049	.293	.159	.048	
5.0	.299	.152	.044	.292	.150	.044	.280	.146	.043	.268	.141	.042	.257	.137	.041	
6.0	.267	.134	.038	.261	.132	.038	.250	.128	.037	.239	.124	.037	.230	.121	.036	
7.0	.241	.119	.034	.236	.118	.034	.226	.114	.033	.216	.111	.032	.208	.108	.032	
8.0	.220	.108	.030	.215	.106	.030	.206	.103	.029	.198	.100	.029	.190	.097	.028	
9.0	.202	.098	.027	.198	.097	.027	.190	.094	.027	.182	.091	.026	.175	.089	.026	
10.0	.187	.090	.025	.183	.089	.025	.176	.086	.024	.169	.084	.024	.162	.082	.023	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.247	.247	.247	.211	.211	.211	.144	.144	.144	.083	.083	.083	.026	.026	.026	
1.0	.255	.211	.172	.218	.181	.148	.149	.125	.102	.086	.072	.059	.027	.023	.019	
2.0	.252	.189	.135	.216	.162	.117	.148	.112	.082	.085	.065	.048	.027	.021	.016	
3.0	.246	.173	.115	.211	.149	.100	.145	.104	.070	.083	.061	.041	.027	.020	.014	
4.0	.237	.161	.103	.203	.139	.090	.140	.097	.063	.081	.057	.037	.026	.018	.012	
5.0	.228	.152	.095	.196	.131	.083	.135	.092	.059	.078	.054	.035	.025	.018	.011	
6.0	.219	.144	.090	.188	.125	.078	.130	.087	.055	.075	.051	.033	.024	.017	.011	
7.0	.210	.137	.086	.181	.119	.075	.125	.083	.053	.073	.049	.032	.023	.016	.010	
8.0	.202	.131	.083	.174	.114	.072	.120	.080	.051	.070	.047	.031	.023	.015	.010	
9.0	.194	.126	.081	.167	.110	.070	.116	.077	.050	.068	.046	.030	.022	.015	.010	
10.0	.187	.122	.079	.161	.106	.069	.112	.075	.049	.065	.044	.029	.021	.014	.010	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: 3W		TYPE:LED					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.:		SUR.:					PROTECTION ANGLE:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	7.1	8.9	7.5	9.3	9.7	7.0	8.9	7.4	9.3	9.7	
3H	11.9	13.7	12.4	14.1	14.5	12.2	13.9	12.6	14.4	14.8	
4H	14.4	16.0	14.8	16.5	16.9	14.7	16.4	15.1	16.8	17.3	
6H	16.5	18.1	16.9	18.5	19.0	16.6	18.2	17.1	18.7	19.2	
8H	17.3	18.9	17.8	19.3	19.8	17.3	18.9	17.8	19.3	19.8	
12H	18.0	19.5	18.5	20.0	20.5	17.8	19.3	18.3	19.8	20.3	
4H 2H	8.7	10.4	9.2	10.9	11.3	8.7	10.4	9.2	10.8	11.3	
3H	13.5	15.0	13.9	15.5	16.0	13.7	15.3	14.2	15.7	16.2	
4H	15.9	17.3	16.4	17.8	18.4	16.3	17.7	16.8	18.2	18.7	
6H	18.1	19.4	18.6	19.9	20.5	18.3	19.6	18.8	20.1	20.7	
8H	18.9	20.2	19.5	20.7	21.3	19.0	20.3	19.6	20.8	21.4	
12H	19.7	20.9	20.2	21.4	22.0	19.6	20.7	20.1	21.3	21.9	
8H 4H	16.8	18.1	17.4	18.6	19.2	17.1	18.4	17.7	18.9	19.5	
6H	19.1	20.2	19.7	20.8	21.4	19.3	20.4	19.9	21.0	21.6	
8H	20.1	21.1	20.7	21.7	22.3	20.2	21.2	20.8	21.8	22.4	
12H	21.0	21.9	21.6	22.5	23.1	20.9	21.8	21.5	22.4	23.0	
12H 4H	17.0	18.2	17.6	18.7	19.3	17.3	18.4	17.8	19.0	19.6	
6H	19.4	20.4	20.0	21.0	21.6	19.6	20.6	20.2	21.1	21.8	
8H	20.5	21.4	21.1	22.0	22.6	20.5	21.4	21.1	22.0	22.6	
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.2					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					

CIE Pub.117 Corrected 266.3 lm Total Lamp Luminous Flux. (8log(F/F0) = -4.6)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	40	26	18	39	26	17	38	25	17	9
0.80	48	32	23	47	32	23	44	31	22	13
1.00	55	39	28	53	38	28	50	40	27	17
1.25	61	45	35	59	44	34	55	42	33	22
1.50	67	51	40	65	50	40	60	48	38	27
2.00	75	61	50	73	59	49	68	56	47	35
2.50	81	68	57	78	66	56	73	62	54	41
3.00	86	74	64	83	71	62	77	67	60	47
4.00	92	82	73	89	79	71	83	75	68	54
5.00	96	87	79	93	85	77	87	80	73	60
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

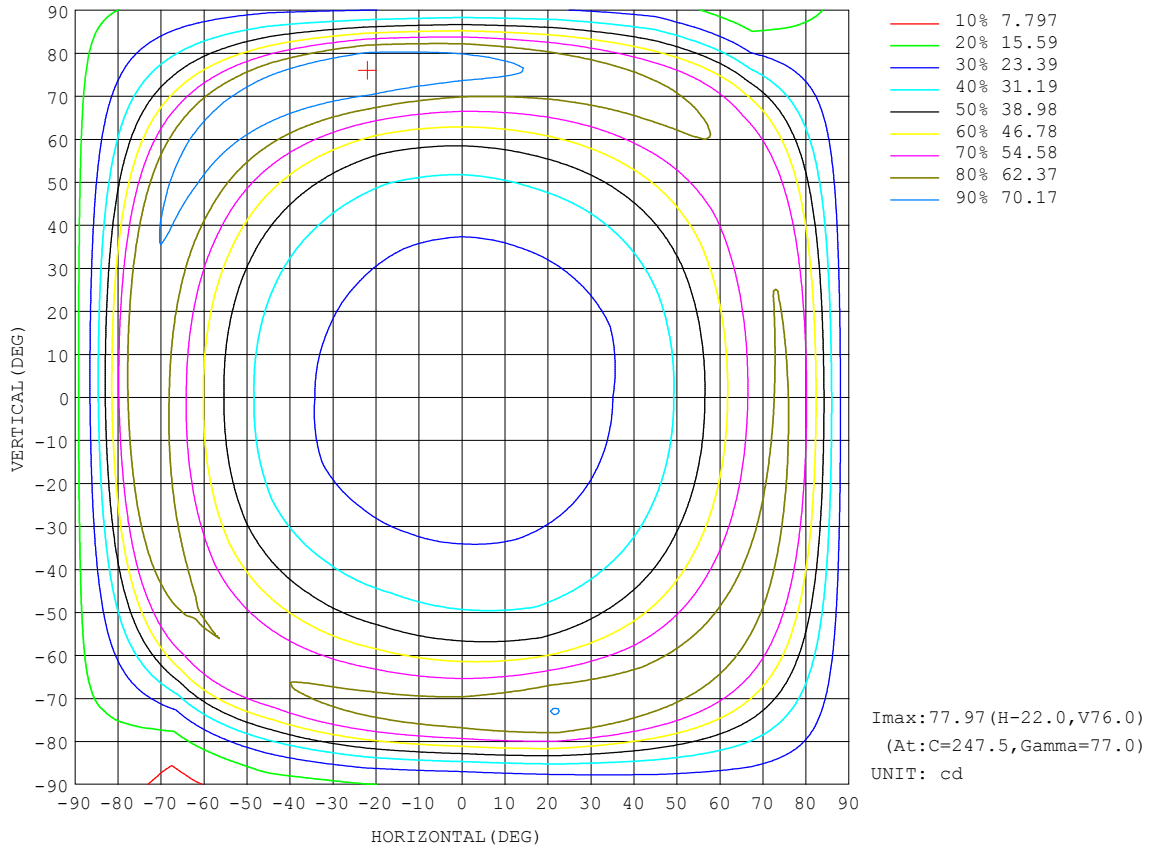


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: MARWAN
Test Date: 2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.284
Humidity: 65.0%
Test Distance: 6.280m [K=1.0000]
Remarks:

AAI Figure

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

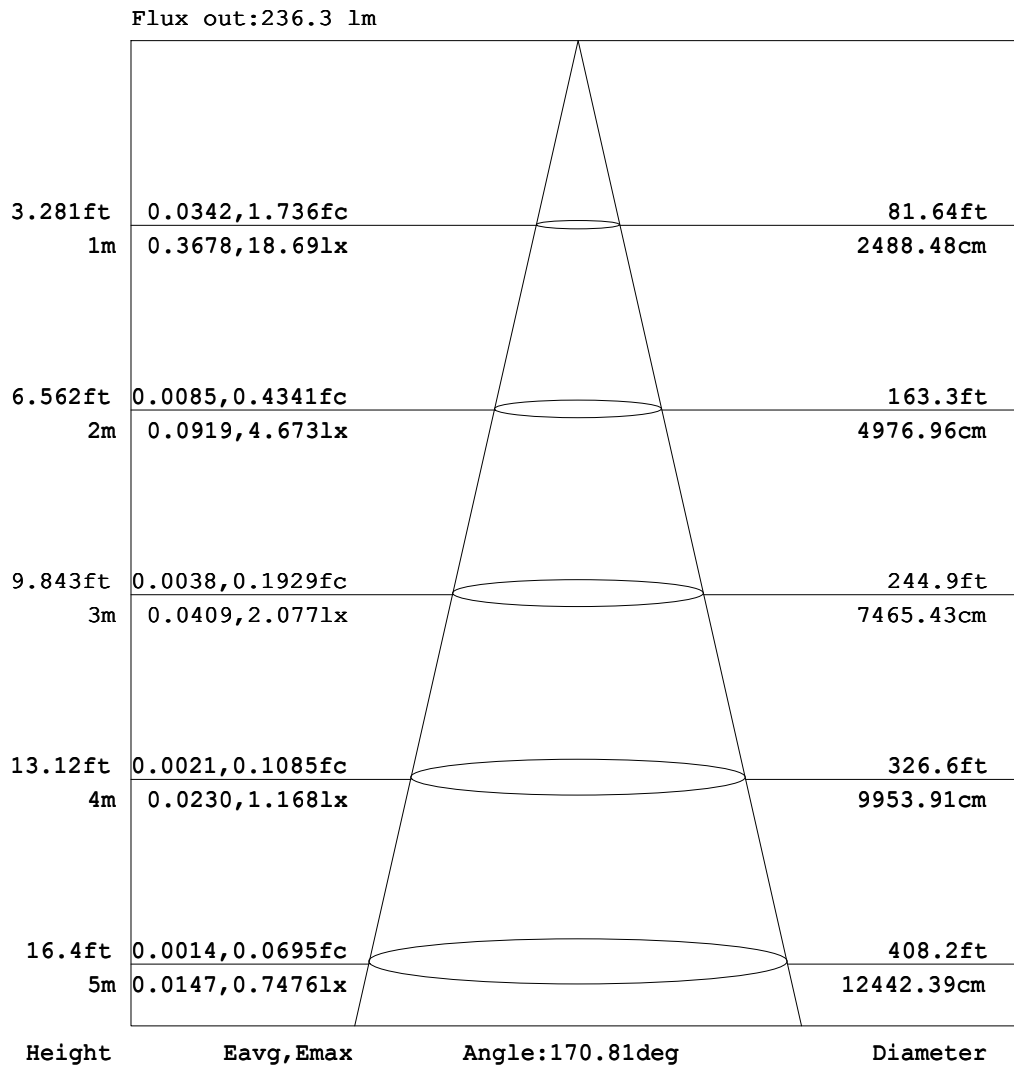


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:MARWAN
Test Date:2016-06-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
Humidity:65.0%
Test Distance:6.280m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: 3W	TYPE: LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

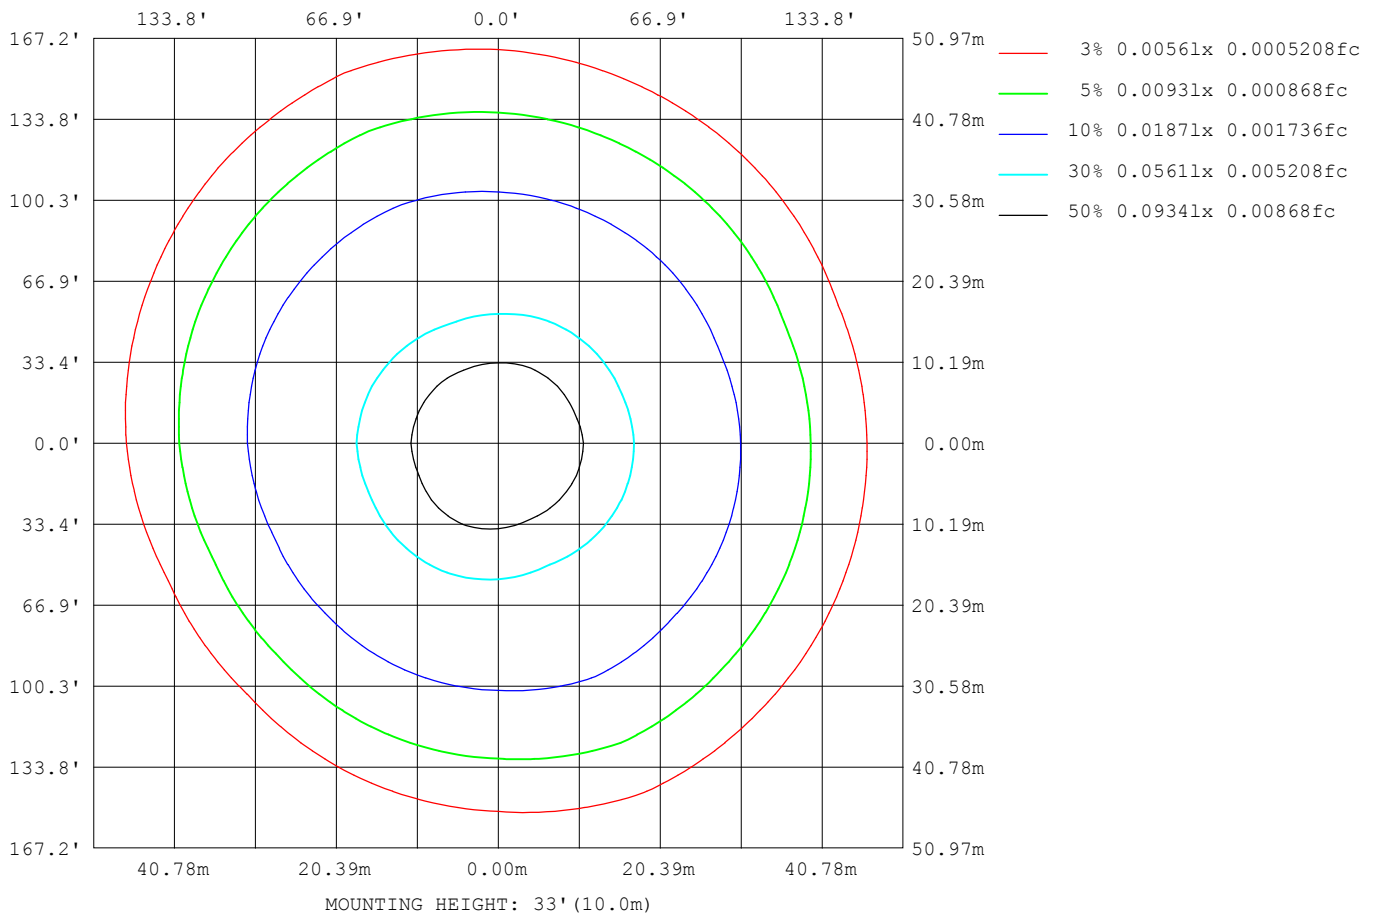

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks:

Planar Illuminance Curve

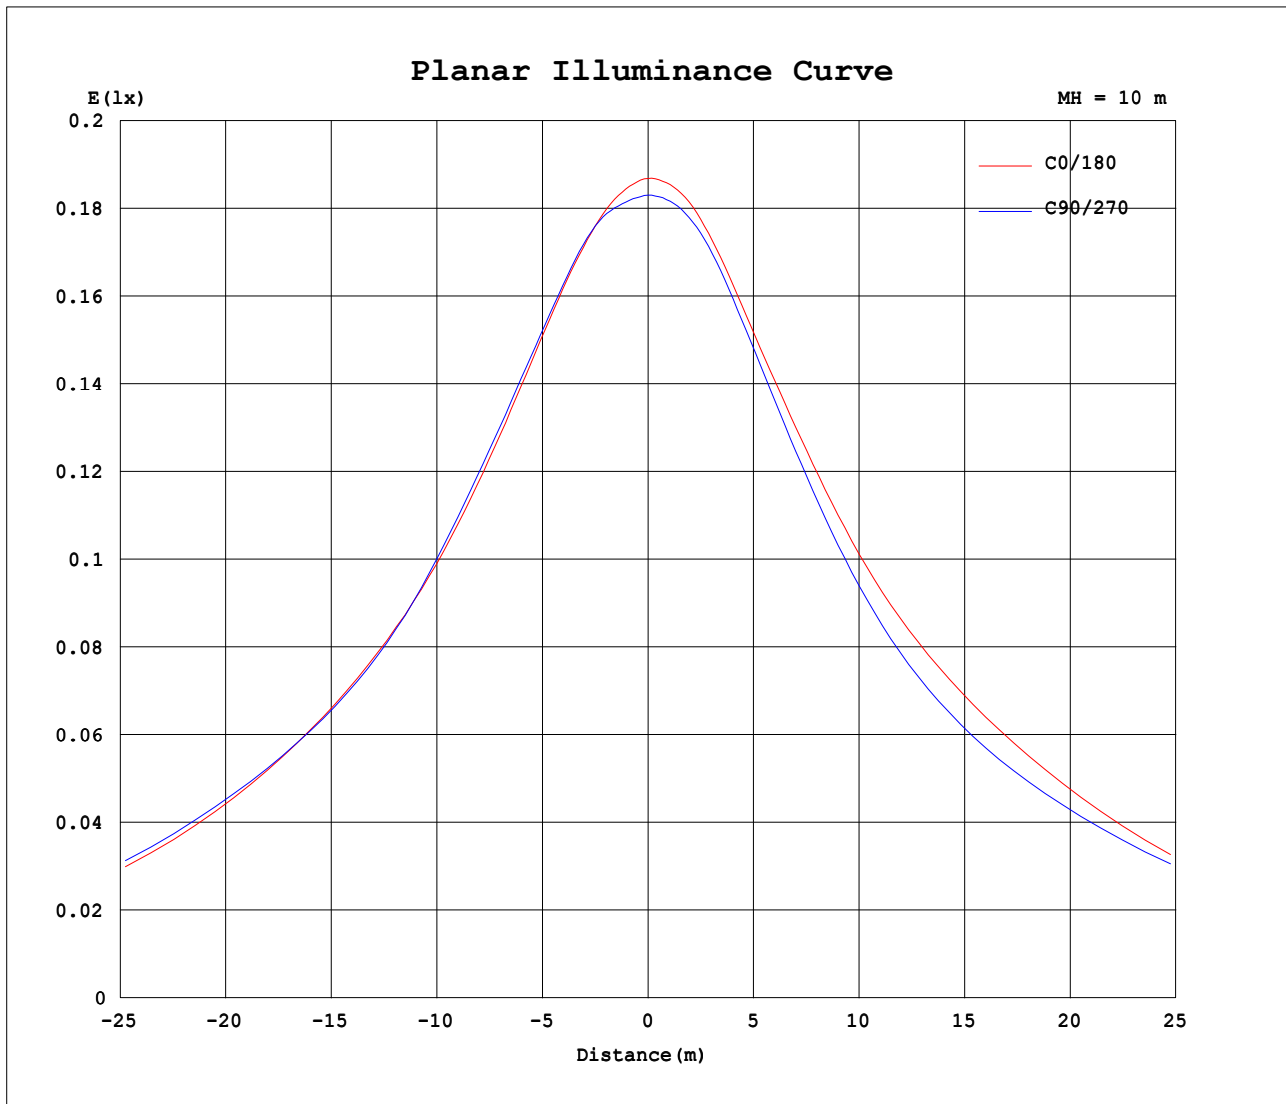

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: MARWAN
 Test Date: 2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity: 65.0%
 Test Distance: 6.280m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 3W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338			
0	18.7	18.6	18.5	18.4	18.3	18.3	18.2	18.2	18.7	18.6	18.5	18.4	18.3	18.3	18.2	18.2			
5	18.7	18.6	18.5	18.5	18.4	18.4	18.3	18.3	18.8	18.7	18.6	18.5	18.4	18.3	18.3	18.2			
10	19.0	19.0	18.9	18.9	18.8	18.7	18.6	18.6	19.1	19.0	18.9	18.8	18.7	18.6	18.5	18.4			
15	19.4	19.4	19.5	19.4	19.4	19.3	19.1	19.1	19.5	19.5	19.4	19.3	19.2	19.0	18.8	18.8			
20	20.0	20.1	20.1	20.1	20.1	20.0	19.8	19.6	20.1	20.1	20.0	19.9	19.7	19.6	19.4	19.2			
25	20.8	21.0	20.9	20.9	20.9	21.0	20.8	20.4	20.9	20.9	20.8	20.6	20.4	20.3	20.1	20.0			
30	21.9	22.0	22.0	21.9	22.1	22.2	22.0	21.6	22.1	22.0	21.9	21.5	21.4	21.4	21.2	21.0			
35	23.4	23.4	23.3	23.3	23.7	23.9	23.7	23.2	23.7	23.6	23.3	22.8	22.7	22.7	22.6	22.4			
40	25.3	25.2	25.1	25.2	25.8	26.2	25.9	25.3	25.8	25.6	25.2	24.6	24.4	24.6	24.5	24.3			
45	28.0	27.9	27.6	27.4	28.3	29.2	28.8	28.1	28.6	28.2	27.7	26.8	26.6	27.1	27.1	27.0			
50	31.9	31.6	31.2	30.5	31.7	33.1	33.0	32.1	32.7	31.8	31.0	29.8	29.8	30.6	30.8	30.9			
55	37.1	36.9	36.2	35.1	36.7	38.4	38.5	37.7	38.5	37.2	36.0	34.3	34.5	35.6	36.0	36.1			
60	44.0	44.0	43.4	42.7	44.2	45.7	45.8	45.2	46.6	45.3	43.4	41.4	41.5	42.4	42.8	42.8			
65	52.1	52.9	52.9	53.9	53.7	54.6	54.4	54.1	56.4	55.9	53.9	52.1	51.4	51.2	51.3	50.6			
70	59.9	61.5	62.3	65.6	62.9	62.4	61.2	61.3	65.5	66.9	66.2	65.9	62.8	61.2	60.1	58.1			
75	62.9	64.5	66.2	70.3	65.3	62.8	60.0	60.7	67.7	72.1	74.8	76.7	72.2	68.2	65.2	61.3			
80	55.1	56.0	56.9	58.0	52.0	48.5	43.5	41.8	53.8	60.2	67.8	73.4	69.8	64.3	59.1	54.6			
85	35.4	35.5	34.9	33.7	30.0	27.9	23.2	16.2	29.4	35.0	42.1	46.7	47.7	44.5	38.8	29.4			
90	17.6	19.3	19.4	18.4	16.8	15.4	11.7	6.01	13.2	18.5	21.9	23.2	24.5	23.8	20.2	10.1			
95	7.36	10.6	11.6	11.4	10.4	8.94	5.16	2.95	4.50	10.1	12.7	13.5	13.9	12.9	9.96	4.13			
100	2.23	6.13	7.60	7.80	7.03	5.56	2.11	1.51	1.63	5.78	8.12	8.86	8.89	7.68	4.36	2.22			
105	1.37	3.68	5.26	5.66	5.03	3.64	1.51	0.75	1.23	3.35	5.44	6.16	6.08	4.80	1.98	1.27			
110	1.00	2.40	3.80	4.22	3.76	2.58	1.22	0.58	1.00	2.23	3.78	4.39	4.26	3.09	1.48	0.82			
115	0.88	1.90	2.94	3.33	3.01	2.06	1.08	0.49	0.88	1.82	2.85	3.32	3.16	2.23	1.23	0.70			
120	0.77	1.57	2.42	2.79	2.54	1.73	0.94	0.42	0.75	1.57	2.32	2.69	2.51	1.83	1.03	0.58			
125	0.66	1.32	1.99	2.34	2.11	1.46	0.80	0.35	0.60	1.34	2.00	2.32	2.14	1.57	0.88	0.47			
130	0.52	1.14	1.61	1.83	1.68	1.27	0.69	0.30	0.54	1.17	1.70	2.00	1.83	1.35	0.74	0.38			
135	0.42	0.99	1.38	1.50	1.46	1.13	0.55	0.26	0.40	1.03	1.41	1.63	1.50	1.19	0.63	0.30			
140	0.35	0.87	1.23	1.36	1.32	0.98	0.44	0.24	0.33	0.94	1.29	1.42	1.32	1.04	0.53	0.26			
145	0.31	0.74	1.10	1.22	1.17	0.86	0.36	0.22	0.27	0.85	1.18	1.30	1.19	0.94	0.41	0.24			
150	0.25	0.56	0.95	1.06	1.01	0.68	0.27	0.18	0.22	0.71	1.04	1.18	1.05	0.81	0.26	0.22			
155	0.21	0.32	0.76	0.86	0.80	0.47	0.21	0.17	0.18	0.56	0.69	1.00	0.89	0.65	0.22	0.20			
160	0.19	0.23	0.44	0.60	0.53	0.24	0.18	0.16	0.17	0.28	0.57	0.55	0.63	0.20	0.18	0.18			
165	0.17	0.17	0.25	0.28	0.24	0.17	0.17	0.15	0.15	0.21	0.25	0.29	0.21	0.21	0.16	0.17			
170	0.17	0.16	0.17	0.17	0.17	0.16	0.16	0.15	0.15	0.17	0.17	0.18	0.17	0.17	0.15	0.16			
175	0.16	0.15	0.16	0.15	0.15	0.15	0.15	0.14	0.15	0.16	0.15	0.15	0.15	0.15	0.15	0.15			
180	0.15	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.14			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MARWAN
 Test Date:2016-06-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.284
 Humidity:65.0%
 Test Distance:6.280m [K=1.0000]
 Remarks: