



LED STRIP LIGHTING

SA FlexA N60 G2 Series

Features

- Generation 2
- Fast and easy installation
- Dimmer Compatibility
- Highest quality genuine 3M adhesive tape backing
- Cuttable each 3 LEDs, Can be formed into any shapes.
- 5 years warranty

Specification

Item Code	Colour	CCT(K)/Wavelength	Luminous Flux(lm)	CRI	IP Rating
SA 81911	Pure White G2	6,500	478lm	90	IP20
SA 81912	Warm White G2	3,000	436lm	90	IP20
SA 81912-A	Warm White G2	4,000	478lm	90	IP20

Technical Characteristics

Power Consumption	4.8W/M
Voltage	DC12V
Current Dissipation(A)	0.4A
Efficiency	up to 99.75lm/W
Viewing Angle	120°
CRI (Ra)	90+
LED Type	2835 LED
Cuttable Length	Every 3LEDs / 50mm
Number of LED	60 EA/M (300 LEDs)

Certification




Temperature Ranges

Operating temperature	-20~60°
Storage temperature	-30~70°

Warranty

Warranty	5 years
----------	---------

IP Rating



For more information please contact

Tel : 07 3219 6711


E-mail : service@sa-led.com

www.SA-LED.com

SAled®

Physical Characteristics

Dimensions(W*H*M)	8*1.5*5000
Weight	75g

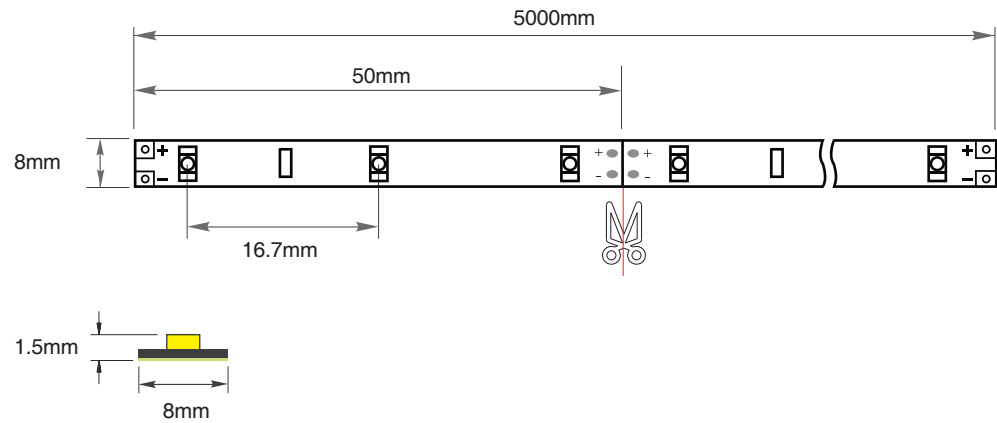

Max in series 5 Metre

