



LED STRIP LIGHTING

SA SN Zigzag Series

Features

- Can be bent really free and can go any surface.
- Dimmer Compatibility
- Highest quality genuine 3M adhesive tape backing
- Cuttable each 3 LEDs, can be formed into any shapes
- Low temperature, Better stability
- Indoor(IP22)
- Up to 4Years Warranty


Specification

| Item Code | Colour | CCT(K)/Wavelength | Luminous Flux(lm) | IP Rating |
|---------------------|------------|-------------------|-------------------|-----------|
| SA 17321 ECO | Pure White | 6,500 | 518 | IP22 |
| SA 75321 | Pure White | 6,500 | 763 | IP22 |
| SA 75322 | Warm White | 3,000 | 763 | IP22 |
| SA 75322-A | Warm White | 4,000 | 763 | IP22 |



Technical Characteristics

| | |
|---------------------|------------------------------------|
| Power Consumption | 7.2W/M |
| Voltage | DC12V |
| Current Dissipation | 0.6A |
| Efficiency | 106lm/W, 72lm (SA 17321 ONLY) |
| Viewing Angle | 120° |
| CRI(Ra) | 80+ |
| LED Type | 2835T LED, 2835LED (SA 17321 ONLY) |
| Cutttable Length | Every 3 LEDs / 41.66mm |
| Number of LED | 72EA/M (360 LEDs) |



Certification



Temperature Ranges


| | |
|-----------------------|----------|
| Operating temperature | -20~60°C |
| Storage temperature | -30~70°C |

Warranty

| | |
|----------|--------------------------------|
| Warranty | 4years, 2years (SA 17321 ONLY) |
|----------|--------------------------------|

Physical Characteristics

| | |
|-------------------|--------------|
| Dimensions(W*H*M) | 6.5*2.5*5000 |
| Weight | 74g |

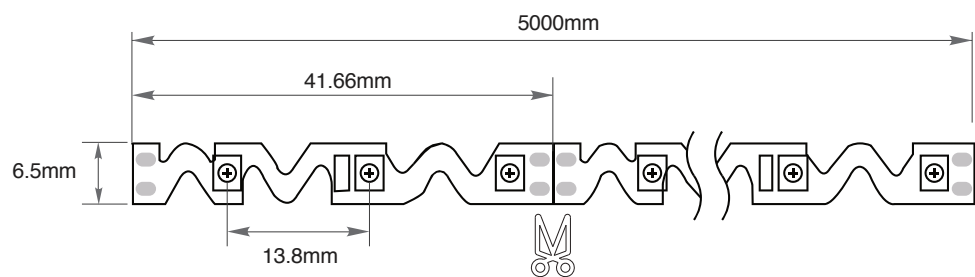

Max in series **3 Metre**

***Up-to 3 metre in a single series**

