



LED STRIP LIGHTING

SA Mini Zigzag 120 IP64 Series

Features

- Can be bent really free and can go any surface.
- Dimmer Compatibility
- Highest quality 3M adhesive tape backing.
- Cutable Single Cut(8mm) or each 2LEDs (12mm)
- IP64 Weatherproof.
- 5 Years Warranty


Specification

Item Code	Colour	CCT(K)/Wavelength	Luminous Flux(lm)	Efficacy(lm/W)
SA 383F1 <small>Single Cut</small>	Pure White	6,500	720	100
SA 383F2 <small>Single Cut</small>	Warm White	3,000	720	100
SA 383F2-A <small>Single Cut</small>	Warm White	4,000	720	100
SA 383F3	Red	620-630nm	158-209	22-29
SA 383F4	Blue	465-470nm	108-158	15-22
SA 383F6	Green	515-525nm	360-468	50-65



Technical Characteristics

Power Consumption	7.2W/M
Voltage	DC24V
Current Dissipation	0.3A
Viewing Angle	120°
IP Rating	IP64
CRI (Ra)	80+
LED Type	2835 LED
Cutable Length	Single Cut with 8mm Every 2 LEDs / 12mm
Number of LED	120EA/M (600 LEDs)



Certification



Temperature Ranges

Operating temperature	-20~60°
Storage temperature	-30~70°


Warranty

Warranty	5 years
----------	---------


Physical Characteristics

Dimensions(W*H*M)	5*1.5*5M
Weight	74g

Single Cut - 6500K, 3000K, 4000K

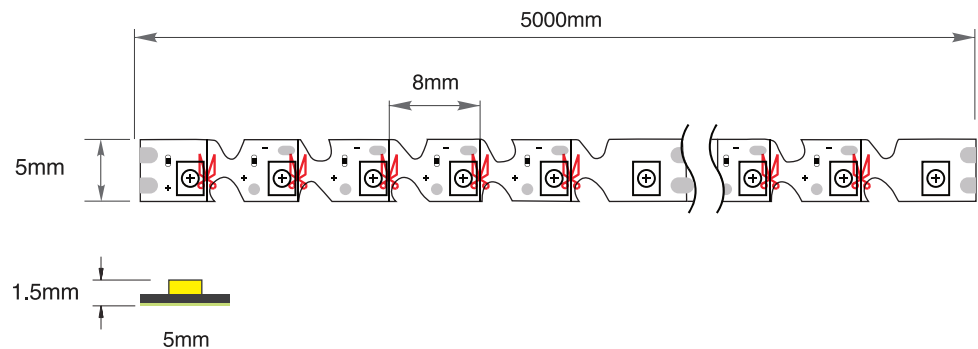


Every 2 LEDs Cut - Red, Blue, Green

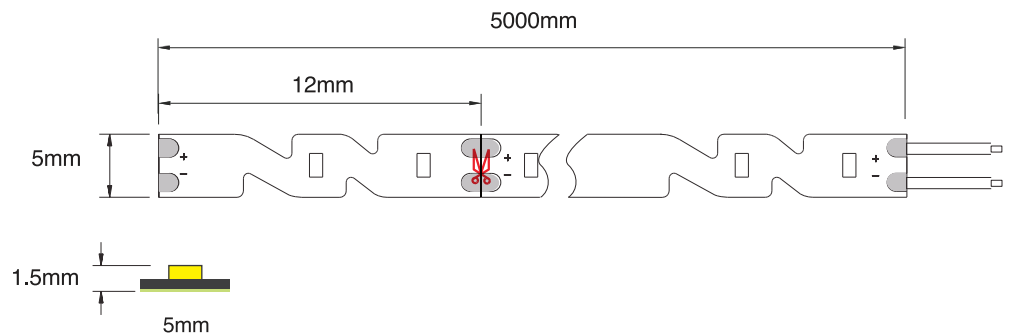

| Max in series 5 Metre

Single Cut - 6500K, 3000K, 4000K

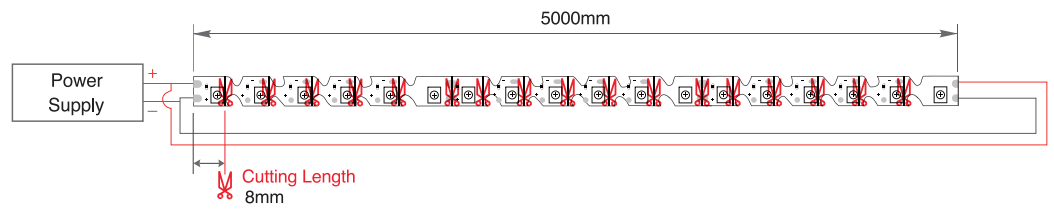

Every 2 LEDs Cut - Red, Blue, Green

