



LED STRIP LIGHTING

SA Mini Zigzag 120_WT

Features

- Can be bent really free and can go any surface.
- Dimmer Compatibility
- Highest quality genuine 3M adhesive tape backing
- Cuttable each 3 LEDs, can be formed into any shapes
- Low temperature, Better stability
- IP64 Weatherproof.
- 5 Years Warranty


Specification

Item Code	Colour	CCT(K)/Wavelength	Luminous Flux(lm)	Efficacy(lm/W)
SA 783F1	Pure White	6,500	720	100
SA 783F2	Warm White	3,000	720	100
SA 783F2-A	Warm White	4,000	720	100
SA 783F3	Red	620-630nm	158-209	22-29
SA 783F4	Blue	465-470nm	108-158	15-22
SA 783F6	Green	515-525nm	360-468	50-65



Technical Characteristics

Power Consumption	7.2W/M
Voltage	DC12V
Current Dissipation	0.6A
Viewing Angle	120°
IP Rating	IP64
CRI(Ra)	80+
LED Type	2835 LED
Cuttible Length	Every 3 LEDs / 25mm
Number of LED	120EA/M (600 LEDs)



Certification



Temperature Ranges


Operating temperature	-20~60°
Storage temperature	-30~70°

Warranty


Warranty	5 years
----------	---------

Physical Characteristics



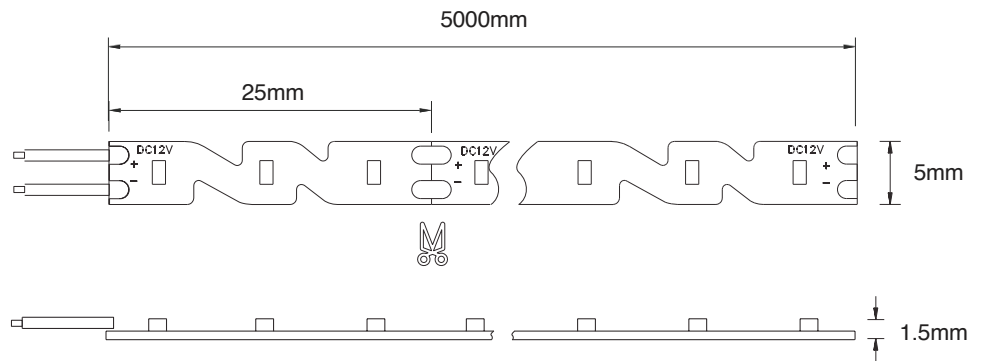


Dimensions(W*H*M)	5*1.5*5M
Weight	74g

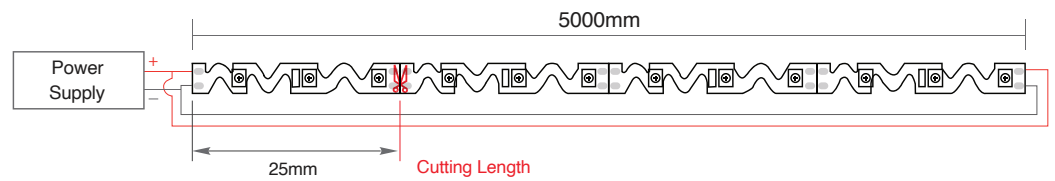

Max in series **5 Metre**



***All Strip**

Model	Item Code	Features	Diemension(mm)	
Mount Clip Sets	SA 9911	Silicone Mounting Clip Sets for Outdoor (5Sets/Pack) (1Set: 5mounting clips, 1endcap and 6screws)	W:60 L:85 H:20	
WAGO connector	SA 926-J	2 WAGO Connectors 1 Jar (100ea)	W:13.2 L:18.8 H:8.4	
LED Wire	SA 917	LED Wire UL 22AWG Red&White (50M/Roll)	-	
*This is the product we recommend, but you can discover more Connectors & LED wires on our website.				
Jump Wire	SA 95D1	Welding Jump Wire_50mm (100pcs)	W:50 L:55 H:60	
Jump Wire	SA 95D2	Welding Jump Wire_100mm (100pcs)	W:100 L:55 H:60	
Jump Wire	SA 95D3	Welding Jump Wire_150mm (100pcs)	W:150 L:55 H:60	